



FEATURE HIGHLIGHTS

- Ideal for IoT and IIoT applications; supports Node-RED and dashboard
- Wide -40°C~85°C temperature range for Industrial-grade reliability
- VPN over IPsec, OpenVPN or PPTP; data-rate up to 37.9Mbps*
- 2 x 10/100Mbps Ethernet port or 2x 100/1000 SFP slot
- 4 x RS-232/422/485 port – models available with or without isolation
- 1 x USB2.0 high speed OTG port
- Optional 802.3af PoE models can be powered by Ethernet cable
- ATOP customized Linux SDK environment with reliable APIs
- Rugged metal housing with wall or DIN-Rail mount support
- Industrial EMC protection

PRODUCT DESCRIPTION


Providing connectivity for the Internet of Things

ATOP's Industrial Embedded Computer is your ideal flexible Gateway to the Internet of Things. It provides Serial and Ethernet connectivity, redundant power input and a relay output in a reliable and powerful Industrial Grade platform that can unlock your potential. Based on your specific application, it allowing almost any serial device to be connected, providing and retrieving the data you need to and from the cloud, no matter what provider you're using.

Programmability

Write your customized application in C language and Run it on its powerful Industrial low-power 800MHz ARM Cortex A8 TI Sitara AM3354 CPU. Make flexible use of your peripherals, no matter storage, Serial, or USB are needed.

SE5904D is available as a Standard SDK or Node-RED version. The Node-RED version, embedding a Node-RED SD-card, adds to the powerful hardware platform, the possibility add the ATOP-Customized Node-RED environment and an user-friendly Device Configuration UI. Node-RED, an open source Building-Block programming environment, will allow you to build your IoT application from an user-friendly, hardware-tailored application design environment and dashboard.

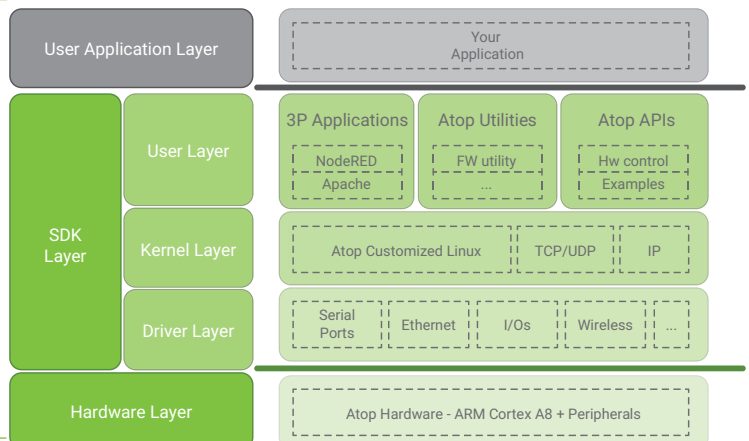

Rugged and flexible for advanced developments

SE5904D embeds *high EMC protection, wide temperature operation*, programming and installation flexibility in one device. A dedicated **PoE version** allows you to power on the device through Power over Ethernet (IEEE802.3af) without the need of separate and space consuming power supply. **SFP version** enhances the device providing long range fiber optic connectivity capability, in the need of a stable and remote fiber connection.

*: Node-RED version only - Test carried out with one VPN-IPsec Tunnel, Peer-to-Peer mode, Ethernet cable.

APPLICATION

The **IoT** (Internet of Things) or **IIoT** (Industrial Internet of Things) is a trending topic these days. It's all about bringing devices, sensors, actuators, data and commands to the cloud, with the ultimate goal to improve the quality of life, the services Smart Cities can offer, saving energy or saving money. This requires two things: to vehiculate the collected data to the cloud in a format that can be recognized and processed and to process, compute and analyze all this amount of data in real time.

It is not a concept far from reality. Imagine you'd like to bridge a Modbus Sensor to the cloud. And you'd like to have the application running on the cloud to be able to process multiple sensors' data, and to trigger some event in some specific stations along the network. You may also have the need to override the cloud control and manage the application locally. Any application has its story.


Here at ATOP, we understand these different needs and we are providing you different working models, based on what your needs are.

Use the Standard SDK, programmable embedded computer if:

- You are familiar with Linux OS
- You have ANSI C programming skills
- Your application is strictly time/ performance sensitive
- Your application has very critical exception handling requirements

Our SDK products provide:

- Ported, proven and tested peripherals (such as I/Os, Ethernet, Serial, Relays) and integrated drivers
- ATOP customized Linux Kernel and network protocols
- Ported, debugged and proven third party applications
- Utilities and APIs to control the hardware in an easy and effective way
- Example of source code

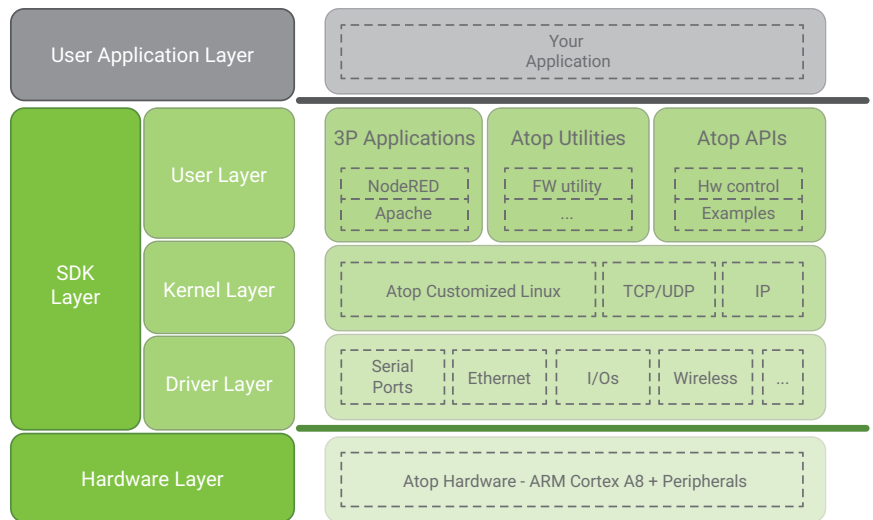


Use ATOP's Node-RED version with the embedded SD-card if:


- You're hands-on, with a good understanding of protocols, data formats
- You have some basic Javascript knowledge
- You're looking for a simple, user-friendly and effective way to deploy your applications to the cloud, with a user friendly monitoring dashboard
- You don't have strict performance requirements, and exception handling is not critical

Our Node-RED version provides:


- Node-RED visual application development environment and dashboard, with automatic start on device boot-up, Node.JS based
- ATOP-customized dedicated Web-UI for user friendly device set-up, allowing you to create VPN tunnels, set-up the network settings, date/time, NTP, diagnostics and much more without using Linux command line.
- Different level of security to allow developers to access development environment and users to access dashboard only
- Customized Node-RED APIs (blocks) that will allow you to fully control ATOP powerful hardware and control Relay, Buzzer, diagnostics and much more
- Integrated Modbus and MQTT stacks, for seamless communication with field devices and cloud
- Integrated AWS, Azure, Google and IBM Bluemix Nodes.

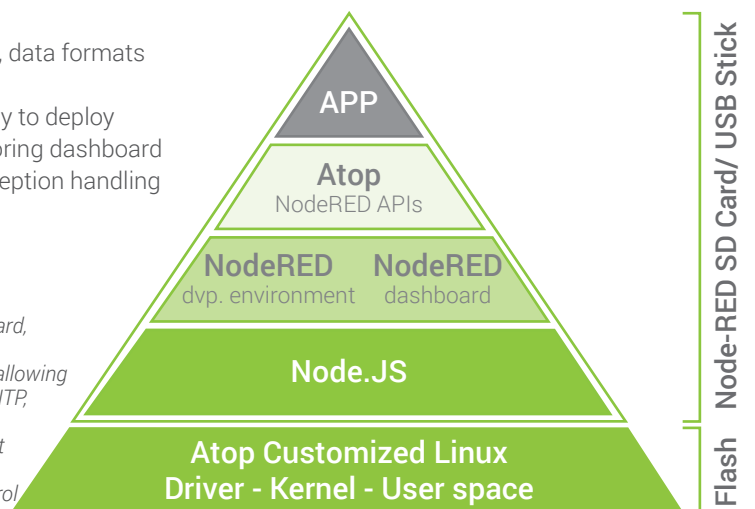


NodeRED development environment

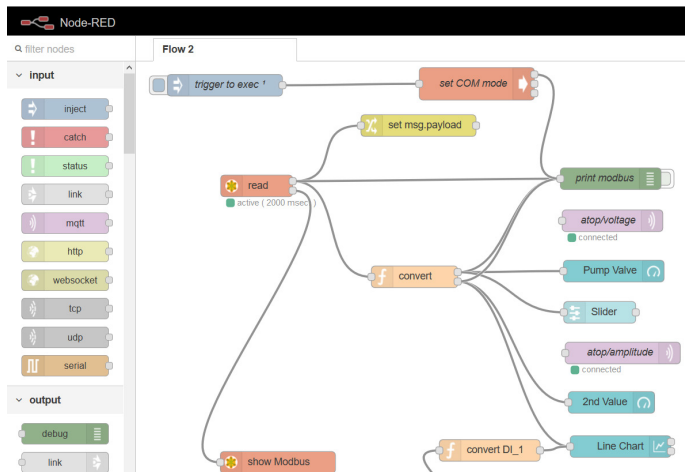

NodeRED dashboard

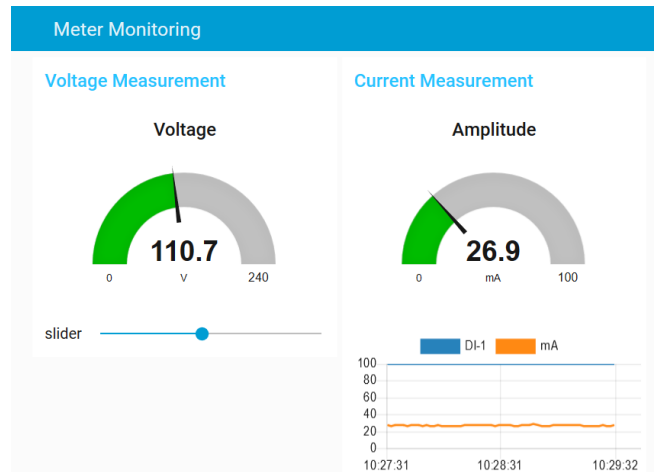

BLOCK DIAGRAM

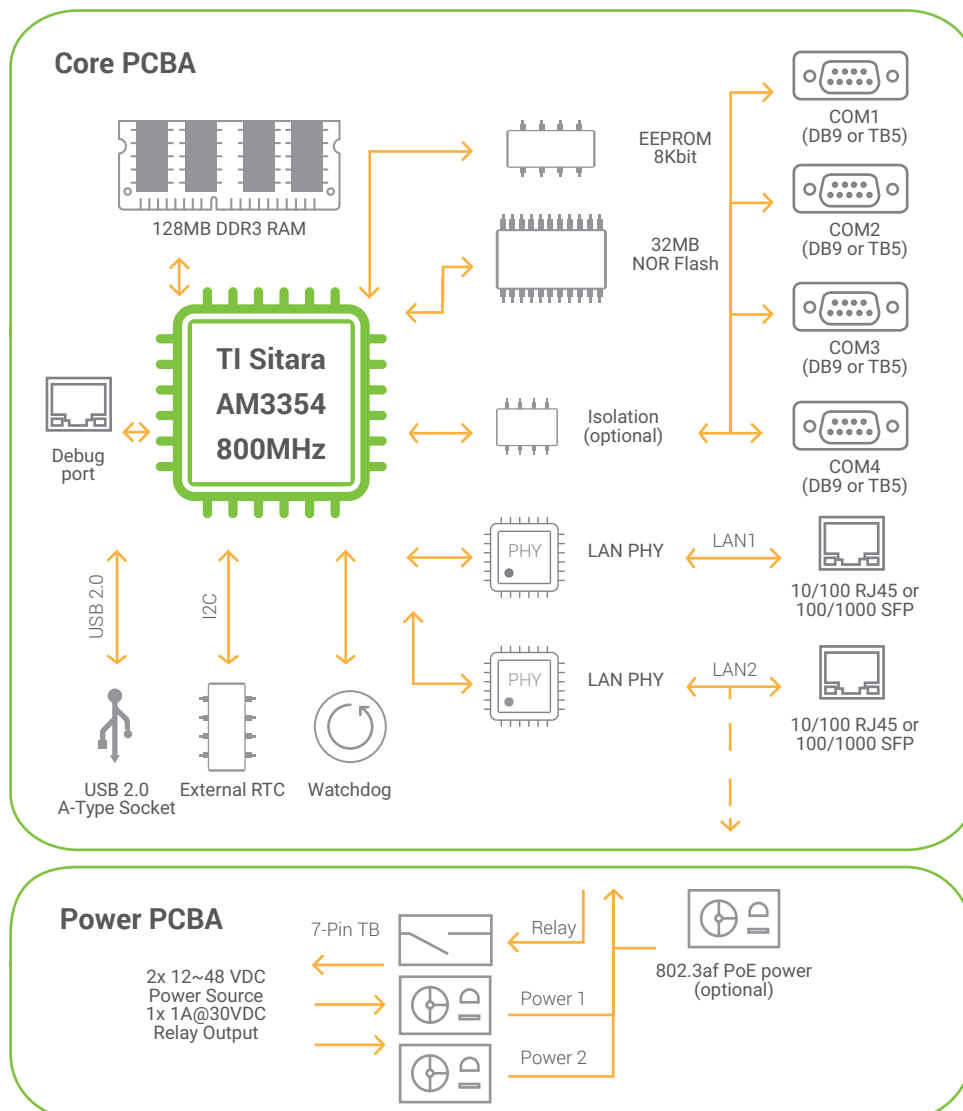


SPECIFICATIONS

Hardware Specifications									
CPU	Texas Instruments Sitara ARM Cortex A8 AM3354 800MHz								
Flash	32 MB NOR Flash (customizable upon request up to 128 MB)								
RAM	SDK version: 128 MB DDR3 (customizable upon request up to 512 MB) Node-RED version: 256 MB DDR3 (upgradable upon request to 512 MB)								
EEPROM	24LC64								
Watchdog	ADM706								
Real Time Clock (RTC)	Yes - with external chip								
Buzzer	Yes								
Console port	Yes - on-board connector								
Reset button	Yes								
Network Interface									
Standards	IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) and 100BaseF(X) IEEE 802.3z for 1000Base-X								
Ethernet Ports	2x 10/100 Mbps RJ-45 or 2x 100/1000 Mbps SFP slot (SFP version)								
Power over Ethernet	IEEE 802.3af on LAN2 (PoE version only)								
Serial Interface									
Connector	D-Sub9 RS-232/485 software selectable (DB model) 5-Pin 5.08mm Terminal Block (TB and SiS model)								
Ports	4 port RS-232/422/485 (2 and 4-wire) + 1 RJ45 console port								
Serial Port Isolation	3 kV (SiS version only)								
Pull-high / Pull-low / Term. resistors	Software selectable.								
Configuration	<table border="0"> <tr> <td>Baud Rate</td> <td>50 ~ 921,600bps</td> </tr> <tr> <td>Data Bits</td> <td>7, 8</td> </tr> <tr> <td>Stop Bits</td> <td>1, 2</td> </tr> <tr> <td>Flow Control</td> <td>None, Xon/Xoff, RTS/CTS (RS-232 only)</td> </tr> </table>	Baud Rate	50 ~ 921,600bps	Data Bits	7, 8	Stop Bits	1, 2	Flow Control	None, Xon/Xoff, RTS/CTS (RS-232 only)
Baud Rate	50 ~ 921,600bps								
Data Bits	7, 8								
Stop Bits	1, 2								
Flow Control	None, Xon/Xoff, RTS/CTS (RS-232 only)								
Other interfaces									
USB ports	1 x USB A Type (USB 2.0) - High-Speed OTG + power								
Software									
Bootloader	U-boot 2014.07								
Linux kernel	Linux 3.14.26								
Linux toolchain	Linux 32 bits toolchain gcc (C/C++ PC cross compiler), glibc								
Linux sample code	RS232, RS485, RTC, watchdog, LED, Relay, Buzzer, Button, network socket								
Additional features (Node-RED version only)	Pre-installed Node-RED SD-card, with auto-run on startup Dedicated Web UI for device settings Integrated DHCP, IPv4, NTP/SNTP client, SNMP v1/v2c/v3, OpenVPN client/server, IPsec, and PPTP.								

Power	
Input Voltage	12~48 VDC IEEE802.3 af (PoE) through LAN 2 - PoE version only
Power Redundancy	Yes, 2 independent power inputs
Relay Output	1x 1A @30 VDC (normal open)
Connector	7-Pin 5.08mm Lockable Terminal Block
Power Consumption	0.65A @ 9VDC (6 W Max)
Reverse Polarity Protection	Yes
Environmental limits	
Operating Temperature	-40°C~85°C (-40°F~185°F)
Storage Temperature	-40°C~85°C (-40°F~185°F)
Ambient Relative Humidity	5%~95%, (Non-condensing)
Mechanicals	
Housing	IP30 protection, SPCC metal housing
Dimensions(W x H x D)	55 x 145 x 113 mm
Installation	DIN-Rail or Wall-Mount (optional kit)
Weight	400 g
Reset Button	Yes

DIMENSIONS & LAYOUT

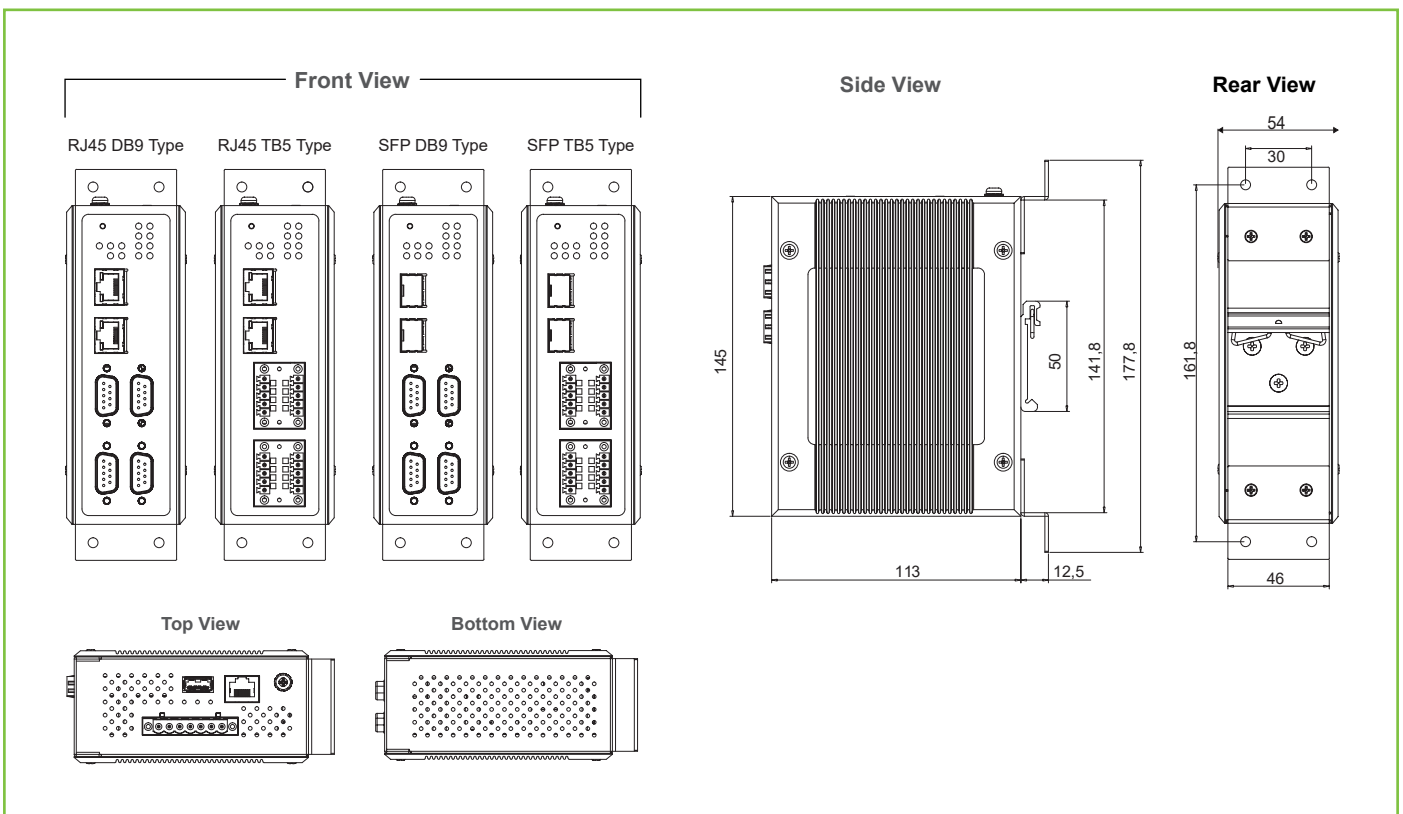

REGULATORY APPROVALS

Regulatory Approvals				
Safety	UL61010-2-201, EN62368			
EMC	FCC Part 15, Subpart B, Class A EN 55032, EN 55024, EN 61000-3-2, EN 61000-3-3, EN 61000-6-2, EN 61000-6-4,			
Test	Item		Value	Level
IEC 61000-4-2	ESD	Contact Discharge	±8kV	4
		Air Discharge	±15kV	4
IEC 61000-4-3	RS	Radiated (enclosure)	10 V/m	3
IEC 61000-4-4	EFT	AC Power Port	±2.0KV	3
		Signal Port	±2.0KV	4
IEC 61000-4-5	Surge	AC Power Port	Line-to Line±1.0KV	3
		AC Power Port	Line-to Earth±2.0KV	3
		Signal Port	Line-to Earth±2.0KV	3
IEC 61000-4-6	CS	Conducted (enclosure)	10 V rms	3
IEC 61000-4-8	PFMF	Enclosure	10 A/m	3
IEC 61000-4-11	DIP	Power Port	-	-
Shock Drop (Freefall) /Vibration	IEC 60068-2-27 IEC 60068-2-32 /IEC 60068-2-64			
RoHS II	Yes			
MTBF	model average 14.56 Years (according to MIL-HDBK-217F)			
Warranty	5 years			

ORDERING INFORMATION

Please note the following suffixes to be added to the chosen model name:

- SDK version suffix: (SDK)
- Node-RED version suffix: -NR

Ordering information				
Model name	Description	Ethernet	Serial	Remarks
SE5904D-4P-DB	Ind. 4-Port Serial Device Server, 10/100BASET(X), DB9	2 (RJ45)	4 (DB9)	
SE5904D-4P-TB	Ind. 4-Port Serial Device Server, 10/100BASET(X), TB5	2 (RJ45)	4 (TB)	
SE5904D-4P-Sis	Ind. 4-Port Ser. Dev. Serv,10/100BASET(X), 3kV Isolated	2 (RJ45)	4 (TB)	3kV isolation
SE5904D-4P-PoE-DB	Ind. 4-Port Ser. Dev. Serv, 10/100BASET(X)with PoE, DB9	2 (RJ45)	4 (DB9)	PoE PD
SE5904D-4P-PoE-TB	Ind. 4-Port Ser. Dev. Serv, 10/100BASET(X)with PoE, TB5	2 (RJ45)	4 (TB)	PoE PD
SE5904D-4P-PoE-Sis	Ind. 4-Port Ser. Dev. Serv, RJ45, PoE, 3kV Isolated	2 (RJ45)	4 (TB)	PoE, 3kV isol.
SE5904D-4P-G-DB-SFP	Ind. 4-Port Ser. Device Server, 100/1000BASEX SFP, DB9	2 (SFP)	4 (DB9)	SFP Gigabit
SE5904D-4P-G-TB-SFP	Ind. 4-Port Serial Device Server, 100/1000BASEX SFP, TB5	2 (SFP)	4 (TB)	SFP Gigabit
SE5904D-4P-G-Sis-SFP	Ind. 4-Port Serial Serv,100/1000BASEX SFP,3kV Isolated	2 (SFP)	4 (TB)	SFP, 3kV isol.

Optional Accessories

Model name	Part Number	Description
SDR-75-24	50500752240001G	75W/3.2A DIN-Rail 24VDC power supply with 88~264VAC / 124~370VDC input
CBL-RJ45(8P)-DB9(F)-90-C	50891971G	8-pin RJ45-DB9 debug cable, 90cm
GDC-120	59906861G	120mm copper woven grounding cable
ADP-DB9(F)-TB5	59906231G	Female DB9 to Female 3.81mm TB5 Converter
WMK-450-Black	70100000000052G	Aluminum wall mount kit
LM28-C3S-TI-N	50708031G	SFP Transceiver, 1250Mbps, 850nmVCSEL, Multi-mode, 550m, 3.3V, -20~85°C
LM38-C3S-TI-N	50709411G	SFP Transceiver, 1250Mbps, 1310nmFP, Multi-mode, 2km, 3.3V, -40~85°C
LS38-C3S-TI-N	50709391G	SFP Transceiver, 1250Mbps, 1310nmFP, Single-mode, 10km, 3.3V, -40~85°C
LS38-C3L-TI-N	50709441G	SFP Transceiver, 1250Mbps, 1310nmDFB, Single-mode, 30km, 3.3V, -40~85°C