


## FEATURED HIGHLIGHTS

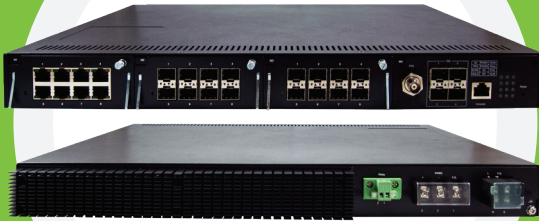

- Supports HSR (IEC 62439-3), PRP (IEC 62439-4) for high-availability
- IEC 61850-3 and IEEE 1613 DNV.GL certification (pending)
- Integrated IEEE 1588v2 hardware-based BC and TC (-BC/SB version)
- Maximum 128Gbps switching capacity, 95.24Mpps throughput
- Rugged industrial design for harsh environments between -40~85°C
- Flexible modular configuration; 3 Module-dedicated slots
- Up to 24 Gigabit ports, and 4x10 Gigabit SFP Uplink slots, 1PPS BNC
- ITU-T G.8032 ERPS Ring, RSTP, or MRP (client) redundancy
- Advanced management features such as QoS and VLAN

## PRODUCT DESCRIPTION

**Flexibility:** ATOP's high-density RHG9528 Rack-mounted managed switch provides the flexibility needed for your application demands. You can choose from among six different Core versions: based on power supply, uplink port configurations and embedded Hardware-Assisted Boundary Clock feature. And you can choose from six different 4- or 8-Port modules to customize your device in a very simple way.

**Designed for Substations:** RHG9528 supports up to **24 Gigabit ports in any 8-port multiple configuration**. Specifically designed for IEC61850 substation backbone use, it is fully certified to meet all IEC61850-3 hardware requirements – such as EMC Level 3, 4 and 5 requirements, Wide temperature range and High availability.


**Award-winning Performance:** RHG9528's IEEE1588v2 Hardware-PTP version received recognition for nanosecond-level accuracy. This makes RHG9528 one of the most reliable GMC backups. And being embedded with Synchronous Ethernet and with full support for PTP profiles.

**High-availability, versatility and power:** When equipped with **High-Availability HSR/PRP modules**, RHG9528 complies with the most stringent redundancy requirements, ensuring no packet loss and guaranteeing GOOSE packets arrive at their respective destinations. RHG9528's high performance provides a network redundant self-recovery mechanism of under 20ms on full load. This enables you to build a reliable network through almost any redundant ring topology. RHG9528 supports ITU-T G.8032 ERPS Ring, IEEE802.1D-2004 RSTP, STP, MSTP, MRP (Master/Client), iA-Ring, iA-Chain and many other compatible ring protocols for network redundancy. With a Multifunctional web dashboard, it offers intelligent features such as Quality of service (QoS), IGMP, port mirroring, and security. It is available in two power input variants: one for low-DC voltage (redundant 24~120VDC input) and one for the more popular High-Voltage applications in the distribution grid (redundant 110~240VAC, 24~120VDC or 120~380VDC input). Additional 4 x 10 Gigabit uplink SFP slots allow RHG9528 to be the backbone of the substation.

# BOUNDARY CLOCK APPLICATION

## High accuracy delivered, even in holdover mode

A boundary clock, is normally a switch that doesn't act transparently to the slaves in the network. Directly connected to the Grandmaster, large networks with thousands of slaves would overload the Grandmaster. So the need for a device that acts as a slave towards the master and as a master towards slaves is achieved with a boundary clock. ATOP's RHG9528 Boundary clock, once synchronized, achieves the 50ns precision set forth in the ITU-T G.8271.1 recommendation. And it is equipped with a high-precision OCXO to guarantee that precision in the event of a link or device failure, with a maximum time-drift of 250ns per from from GNSS time. All this can guarantee a maximum 1.5us end-to-end time deviation budget from the GNSS to the end-application, up to 10 BC hierarchies.

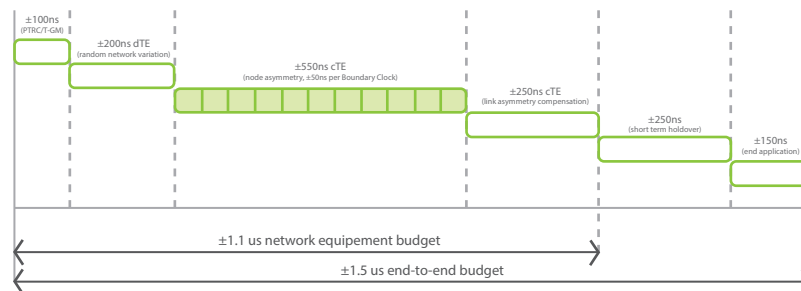


## Application Example

The network diagram shows the use of ATOP's NTS7500 Grandmaster Clock and RHG9528 Boundary clock application.

RHG9528 can easily function as a both Access/Aggregation switch with up to 4x1/10Gbps SFP slots and as a PTP boundary clock. Up to 28 ports can be individually configured to run different instances of IEEE1588v2.

A wide variety of settings are allowed within profiles – such as the Power, and Enterprise profiles. RHG 9528-BS supports Synchronous Ethernet, allowing the transport of time and frequency, which is important for legacy networks such as SDH-SONET.

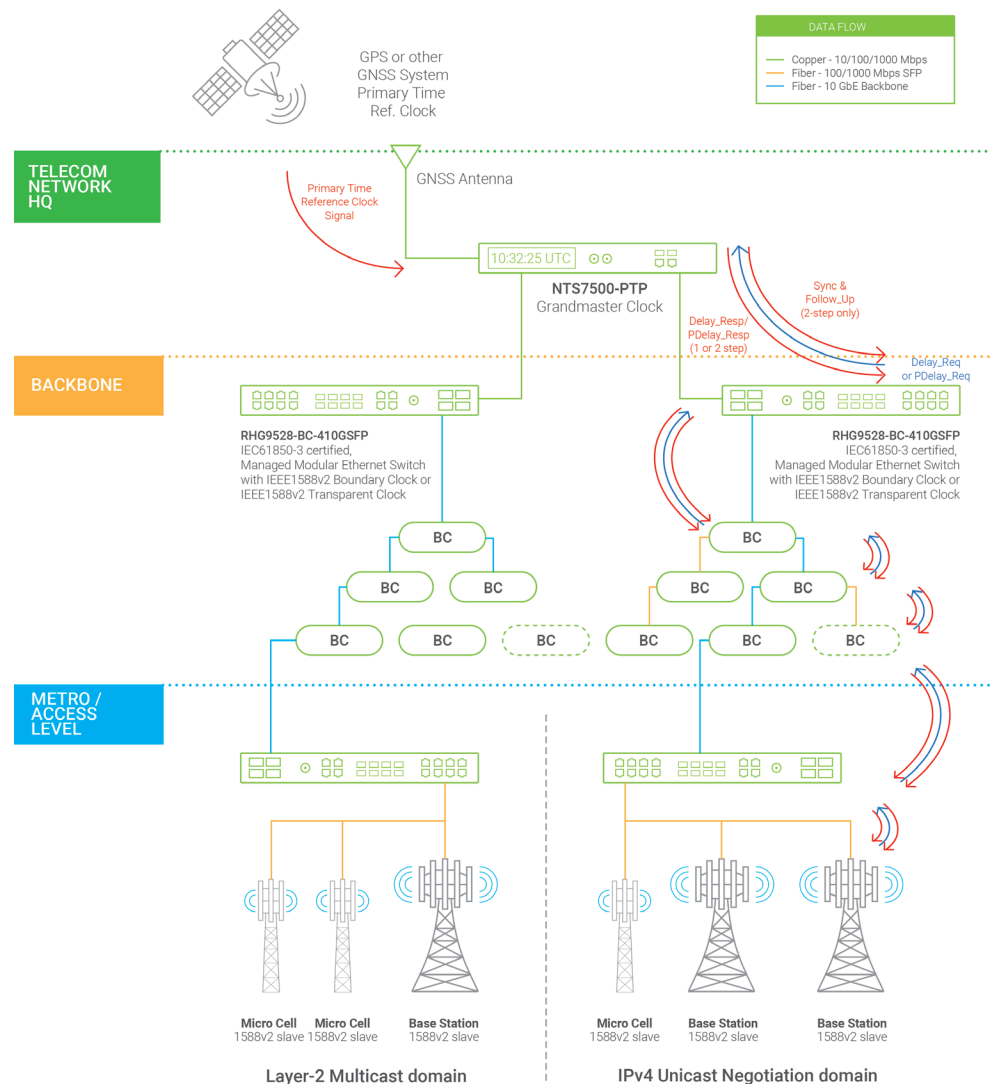


## HIGH AVAILABILITY APPLICATION

### Zero packet loss, on multiple ports

Install a 4-port Gigabit RJ45 or SFP High-Availability module in any of the module slots in RHG9528 CPU board, and you're good to go. Congratulations: your network is now fully compliant with IEC62439-3 Clause 4- 2016 (PRP) and IEC62439-3 Clause 5-2016 (HSR). Simultaneously. Though this 4-port module.

Through HSR/PRP technology, Atop's device will replicate the packet through 2 redundant paths and the end-application will have the risks to lose a packet almost zeroed. This is an example of a mixed HSR/PRP network, where RHG9528 is used flexibly as a Transparent or a Boundary Clock and as an HSR/PRP manager.

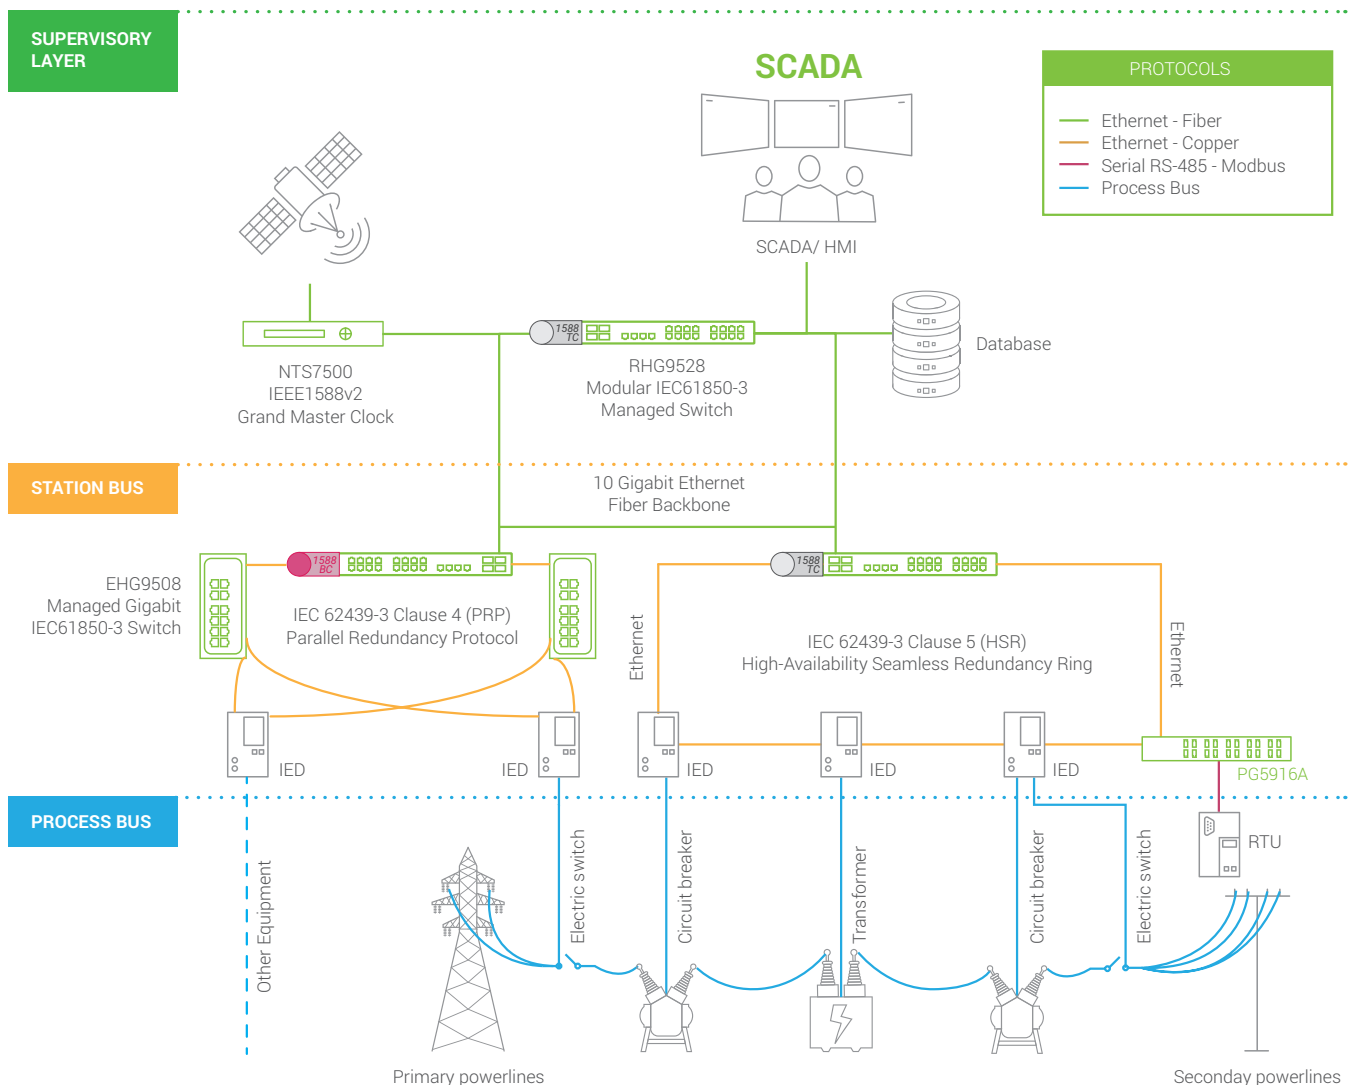

### IEEE1588v2 PTP, IEC61850-9-3 Power Profile and HSR/PRP

RHG9528 is an advanced and flexible platform. It embeds high-bandwidth Switching fabric, Accurate hardware-based Boundary Clock or Transparent Clock, IEC61850-3 compliant hardware, and fully supports IEC/IEEE61850-9-3 - 2016 Power Profile. Also on HSR/PRP ports. When properly configured, our Switch can seamlessly provide Peer-to-Peer transparent clock and Boundary Clock on all ports, HSR/PRP ports included.

## CONFIGURATION EXAMPLE



**RHG9528-410GSFP-SB-HV** Main unit, with 4x 10 Gigabit SFP uplink slots, 1PPS BNC, 120~370VDC, HW PTP BC/TC and SyncE



**RHG9X28-M1**  
8-port Gigabit RJ45 module supporting IEEE1588v2 Hardware BC/TC.



**RHG9X28-M5**  
4-port 10/100/1000Mbps RJ45 High-Avail. module, supporting HSR/PRP.




**RHG9X28-M2**  
8-port Gigabit SFP module supporting IEEE1588v2 Hardware BC/TC.




IEC61850-3 certified Layer-2 Managed Switch, with 8 Gigabit ports, 4 10/100/1000 High-Availability HSR/PRP ports, 8 Gigabit SFP slots, one PPS output BNC (F) plug, and 4 x 10 Gigabit SFP uplinks, supporting IEEE1588v2 HW BC and Synchronous Ethernet.

## DIMENSIONS & LAYOUT

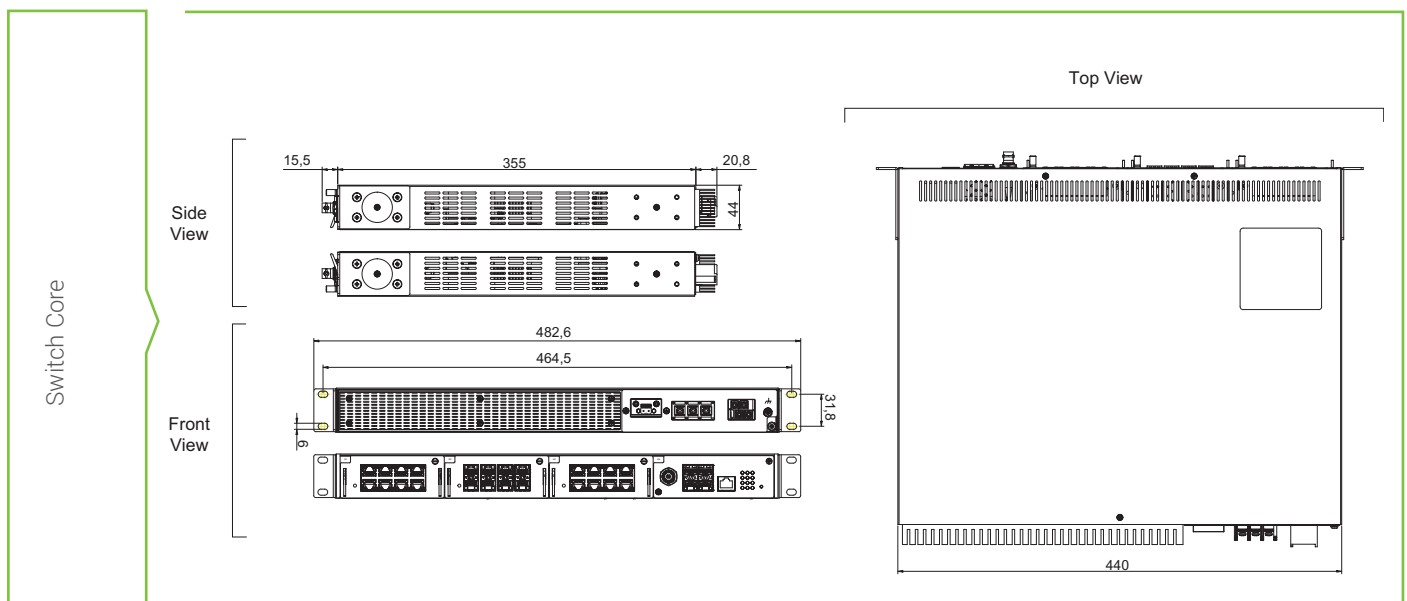

RHG9X28-M1  
 RHG9X28-M2  
 RHG9X28-M3  
 RHG9X28-M4  
 RHG9X28-M5  
 RHG9X28-M6

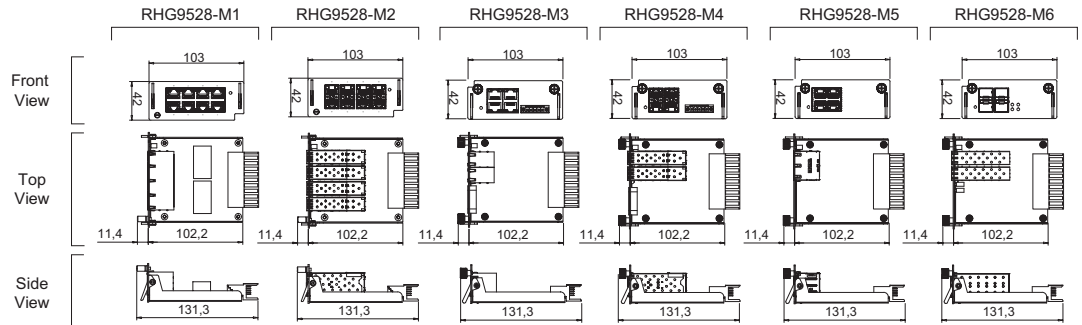

## SPECIFICATIONS

| Switch core               |   |
|---------------------------|---|
| Model Name                | RHG9528   |
| Switch Properties         |   |
| Priority Queues           | 8   |
| VLAN Table                | 512   |
| MAC-Based VLAN            | 512   |
| VLAN ID Range             | VID 1 to 4094   |
| Trunk Group               | 8   |
| Static IGMP Groups        | 128   |
| Dynamic IGMP Groups       | 256   |
| MAC Table Size            | 16k   |
| Packet Buffer Size        | 1.5 MB  |
| Jumbo Frame               | 9216 Byte   |
| Switching Fabric Capacity | 128 Gbps  |
| Maximum throughput        | 95.24 Mpps  |
| Ethernet                  |   |
| Standards                 | IEEE 802.3 for 10BASE-T<br>IEEE 802.3u for 100BASE-T(X)<br>IEEE 802.3u for 100BASE-FX<br>IEEE 802.3ab for 1000BASE-T(X)<br>IEEE 802.3z for 1000BASE-X<br>IEEE 802.3ae For 10 Gigabit Ethernet Fiber<br>IEEE 802.3x for Flow Control, backpressure control<br>IEEE 802.1D-2004 for Rapid Spanning Tree Protocol<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1p for Class of Service<br>IEEE 802.1X for Authentication<br>IEEE 802.1AB Link Layer Discovery Protocol (LLDP)<br>IEEE 802.1Q VLAN.<br>IEEE 802.3ad for Port Trunk with LACP<br>IEC-62439-3 PRP (Parallel Redundancy Protocol)<br>IEEE1588v2 PTP (Hardware-based) - (-SB version only)<br>ITU-T G.8261 Synchronous Ethernet |
| Protocols                 | IPv4, IPv6, IGMPv1/v2/v3, GMRP, GVRP, SNMPv1/v2c/v3, SNMP Inform, ICMP,<br>Telnet, SSH, DHCP Server/Relay/Client, DHCP Option 66/67/82, BootP, TFTP, NTP<br>Server/Client, SNTP, SMTP, RMON, HTTP, HTTPS, Telnet, Syslog, MRP, ERPS,<br>LLDP, IEEE 1588 PTP V2(Hw-based), 802.1x, RADIUS, TACACS+, SyncE, HSR, PRP  |

|   |  |  |  |
|---|--|--|--|
| Redundancy  | IEC62439-3 High-Avail-Seamless-Redundancy(HSR) only RHG9X28-M5/6<br>IEC62439-4 Parallel-Redundancy-Protocol (PRP) - only with RHG9X28-M5/6<br>ITU-T G.8032 ERPS, STP, RSTP, MSTP, MRP, Compatible Ring/Chain, U-Ring |  |  |
| Automation Profiles   | Modbus TCP   |  |  |
| MIB   | MIB II, IF-MIB, SNMPv2 MIB, BRIDGE-MIB, RMON MIB Group 1,2,3,9   |  |  |
| Precision timing  |  |  |  |
| Time Synchronization  | Network Time   | NTP Server/Client, SNTP  |  |
|   | Precision Time Protocol  | Std Version  | IEEE1588v1 BC (SW)<br>IEEE1588v2 BC (SW)<br>IEEE1588v2 TC (HW)-ns accuracy               |
|   |  | PTP (-SB) Version  | IEEE1588v2 BC (HW)-ns accuracy<br>IEEE1588v2 TC (HW)-ns accuracy<br>Synchronous Ethernet |
|   | Holdover Accuracy  | Boundary Clock/<br>SyncE (-SB)   | <30 ns/s (IEEE61850-9-3 compliant)   |
|   | PTP Mode (all versions)  | Layer-2: Multicast, E2E/P2P, two-steps<br>Layer-3 (IPv4):Multicast,Unicast,Unicast Neg. (E2E/P2P)  |  |
|   | Supported Profiles (-SB version)   | C37.238 -2017 Power Profile<br>IEC/ IEEE61850-9-3 Power Profile(2016)  |  |
|   | Additional Interfaces  | RHG9528-410GSFP-BC/SB-XX support hardware-assisted BC/TC also on 4x1G or 4x10G SFP uplink slots.<br>1PPS square pulse issued from a 1PPS output BNC(F) |  |
| Power   |  |  |  |
| Input Voltage   | DC version: redundant 24~120 VDC<br>AC version: redundant 100~240 VAC<br>HV version: redundant 120~380 VDC   |  |  |
| Input Current (Max)   | 2.66A Max, 64W Max (For DC version models)<br>0.7A Max, 50/60Hz (For AC version models)<br>0.52A Max, 62W Max (For HVDC version models)  |  |  |
| Power   | < 70W (85°C).  |  |  |
| Reverse polarity Protection   | Yes  |  |  |
| Relay Output  | 1 Relay Output (24V/1A)  |  |  |
| Connectors  | AC: Barrier Terminal Block 4pin 9.52mm<br>DC: Barrier Terminal Block 3Pin 13mm   |  |  |
| Physical Characteristics  |  |  |  |
| Housing<br>Dimension (W x H x D)<br>Weight<br>Installation                | IP30 SPCC metal housing<br>440 x 44x 355 mm (not including screws, terminal blocks and rack-mount kit)<br>5Kg (not including module but module cover only)<br>1U Rack-mount, Rack-mount kit included                 |  |  |
| Environmental Limits  |  |  |  |
| Operating Temperature<br>Storage Temperature<br>Ambient Relative Humidity | -40°C~75°C (-40°F~158°F)<br>-40°C~85°C (-40°F~185°F)<br>5%~95%, 55°C (Non-condensing)  |  |  |

## Switch Modules



### Technical Specifications

|                   |  |  |  |  |
|-------------------|--|--|--|--|
| Description       | 8-Port RJ45 module                             | 8-Port SFP module                              | 4-Port RJ45 with IRIG-B module                 | 4-port SFP with IRIG-B module                  |
| Model Name        | RHG9X28-M1                                     | RHG9X28-M2                                     | RHG9X28-M3                                     | RHG9X28-M4                                     |
| <b>Properties</b> |  |  |  |  |
| Port speed        | 10/100/1000 Mbps                               | 100/1000 Mbps                                  | 10/100/1000 Mbps                               | 100/1000 Mbps                                  |
| Interface         | RJ45   | SFP Slot                                       | RJ45   | SFP Slot                                       |
| HW PTP IEEE1588v2 | TC/BC (with -BC core)<br>SyncE (with -SB core) | TC/BC (with -BC core)<br>SyncE (with -SB core) | TC/BC (with -BC core)<br>SyncE (with -SB core) | TC/BC (with -BC core)<br>SyncE (with -SB core) |
| HSR/PRP           | No   | No   | Yes, Terminal Block                            | Yes, Terminal Block                            |
| Dimensions        | 102 x 120 x 42 mm                              | 102 x 120 x 42 mm                              | 102 x 120 x 42 mm                              | 102 x 120 x 42 mm                              |
| Weight            | 550 g  | 500 g  | 550 g  | 500 g  |
| Fixing            | 2 x quick-release screws (included)            | 2 x quick-release screws (included)            | 2 x quick-release screws (included)            | 2 x quick-release screws (included)            |



### Technical Specifications

|                   |                                     |                                     |
|-------------------|-------------------------------------|-------------------------------------|
| Description       | 4-Port RJ45 HSR/PRP module          | 4-Port SFP HSR/PRP module           |
| Model Name        | RHG9X28-M5                          | RHG9X28-M6                          |
| <b>Properties</b> |                                     |                                     |
| Port speed        | 10/100/1000 Mbps                    | 100/1000 Mbps                       |
| Interface         | RJ45                                | SFP Slot                            |
| HW PTP IEEE1588v2 | TC/BC (with -BC core)               | TC/BC (with -BC core)               |
| IRIG-B            | 2 Groups                            | 2 Groups                            |
| Dimensions        | 102 x 120 x 42 mm                   | 102 x 120 x 42 mm                   |
| Weight            | 550 g                               | 500 g                               |
| Fixing            | 2 x quick-release screws (included) | 2 x quick-release screws (included) |

## REGULATORY APPROVALS

| Regulatory Approvals       |   |                   |   |       |
|----------------------------|---|-------------------|---|-------|
| Safety                     | UL/EN/IEC(CB) 60950/62368   |                   |   |       |
| EMC                        | FCC Part 15, Subpart B, Class A, EN 55032, EN 55024, EN 61000-6-4:2007+A1 2011, EN 61000-3-2, EN 61000-3-3, EN 61000-6-2:2005 |                   |   |       |
| Power Automation           | IEC61850-3, IEEE 1613   |                   |   |       |
| Test                       | Item  |                   | Value   | Level |
| IEC 61000-4-2              | ESD   | Contact Discharge | ±8KV  | 4     |
|                            |   | Air Discharge     | ±15KV   | 4     |
| IEC 61000-4-3              | RS  | Enclosure Port    | 10(V/m), 80-1000MHz, 80% AM, 1~3GHz   | 3     |
| IEC 61000-4-4              | EFT   | AC Power Port     | ±4.0kV @2.5kHz  | 4     |
|                            |   | DC Power Port     | ±4.0kV @2.5kHz  | 4     |
|                            |   | Signal Port       | ±2.0KV @2.5kHz  | 4     |
| IEC 61000-4-5              | Surge   | AC Power Port     | Line-to Line±2.0kV  | 4     |
|                            |   | AC Power Port     | Line-to Earth±4.0kV   | 4     |
|                            |   | DC Power Port     | Line-to Line±1.0kV  | 3     |
|                            |   | DC Power Port     | Line-to Earth±2.0kV   | 3     |
|                            |   | Signal Port       | Line-to Earth±4.0kV   | 4     |
| IEC 61000-4-6              | CS  | AC Power Port     | 10V rms 0.15-80MHz, 80% AM  | 3     |
|                            |   | DC Power Port     | 10V rms 0.15-80MHz, 80% AM  | 3     |
|                            |   | Signal Port       | 10V rms 0.15-80MHz, 80% AM  | 3     |
| IEC 61000-4-8              | PFMF  | (Enclosure)       | 100A/m continuous, 1000A/m (3s)   | 5     |
| IEC 61000-4-10             | Damped Osc. Magnetic Field  | (Enclosure)       | 100A/m, 100kHz, 1MHz  | 5     |
| IEC 61000-4-11             | DIP   | AC Power Port     | Drop 70% 3 times/s (1period)<br>Drop 40% 3 times/1ms (50 period)<br>Drop 100% 3 times/50m(5-50per.) | -     |
| IEC 61000-4-12             | Damped Oscillatory  | AC Power Port     | 2.5kV common,1kV diff.mode  | 3     |
|                            |   | Signal Port       | 2.5kV common,1kV diff.mode  | 3     |
| Shock<br>Drop<br>Vibration | MIL-STD-810G Method 516.5<br>MIL-STD-810F Method 516.5<br>MIL-STD-810F Method 514.5 C-1 & C-2                                 |                   |   |       |
| RoHS2                      | Yes   |                   |   |       |
| MTBF                       | 20 years  |                   |   |       |
| Warranty                   | 5 years   |                   |   |       |



## ORDERING INFORMATION

### Main core switch ordering information

| Model name            | Part Number     | Description                                    |
|-----------------------|-----------------|--|
| RHG9528-410GSFP-DC    | 1P1RHG95280004G | 4*10G;SFP;2DC                                  |
| RHG9528-410GSFP-AC    | 1P1RHG95280006G | 4*10G;SFP;2AC                                  |
| RHG9528-410GSFP-HV    | 1P1RHG95280005G | 4*10G;SFP;2HV                                  |
| RHG9528-410GSFP-SB-DC | 1P1RHG9528000GG | 4*10G;SFP;2DC;Support HW-Boundary Clock/ SyncE |
| RHG9528-410GSFP-SB-AC | 1P1RHG9528000KG | 4*10G;SFP;2AC;Support HW-Boundary Clock/ SyncE |
| RHG9528-410GSFP-SB-HV | 1P1RHG9528000IG | 4*10G;SFP;2HV;Support HW-Boundary Clock/ SyncE |

### Modules ordering information

| Model name | Part Number     | Description                   |
|------------|-----------------|-------------------------------|
| RHG9X28-M1 | 1P1RHG9X28M101G | 8P*1000TX RJ45 Module         |
| RHG9X28-M2 | 1P1RHG9X28M201G | 8P*1000FX SFP Module          |
| RHG9X28-M3 | 1P1RHG9X28M301G | 4P;RJ45 Module and IRIG-B(TB) |
| RHG9X28-M4 | 1P1RHG9X28M401G | 4P;SFP Module and IRIG-B(TB)  |
| RHG9X28-M5 | 1P1RHG9X28M501G | 4P;RJ45 Module with HSR/PRP   |
| RHG9X28-M6 | 1P1RHG9X28M601G | 4P;SFP Module with HSR/PRP    |

### Optional Accessories

| Model name        | Part Number     | Description  |
|-------------------|-----------------|--|
| AC POWER CORD(US) | 50891741G       | RHG9X28 US AC Power CORD; 183cm  |
| AC POWER CORD(EU) | 50891751G       | RHG9X28 EU AC Power CORD; 180cm  |
| SDR-240-48        | 50502401480001G | DIN RAIL POWER SUPPLY / T; AC 100~240V to 48V~55V DC 5A; 240W              |
| SDR-480-48        | 50504801480001G | DIN RAIL POWER SUPPLY / T; AC 100~240V to 48V~55V DC 10A; 480W             |
| AXFD-1314-0523    | 522AXFD1314001G | SFP Transceiver;155Mbps, Multi-mode;1310nm;2km;-40~85, DDMI                |
| AXFD-1314-0553    | 522AXFD1314011G | SFP Transceiver;155Mbps, Single-mode;1310nm;30km;-40~85, DDMI              |
| AXGD-5854-0513    | 522AXGD5854001G | SFP Transceiver, 1250Mbps, 850nm, Multi-mode, 550m, 3.3V, -40~85°C, DDMI   |
| AXGD-1354-0523    | 522AXGD1354001G | SFP Transceiver, 1250Mbps, 1310nm, Multi-mode, 2km, 3.3V, -40~85°C, DDMI   |
| AXGD-1354-0533    | 522AXGD1354011G | SFP Transceiver, 1250Mbps, 1310nm, Single-mode, 10km, 3.3V, -40~85°C, DDMI |
| AXGD-3354-0593    | 522AXGD3354001G | SFP Transceiver, 1250Mbps, 1310nm, Single-mode, 40km, 3.3V, -40~85°C, DDMI |
| AXXE-5886-05B3    | 522AXXE5886001G | SFP Transceiver,10Gbps Multi;850nm;300m;-40~85°C                           |