


FEATURED HIGHLIGHTS

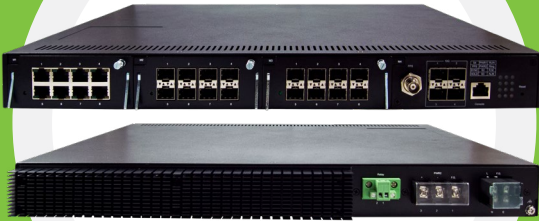

- Supports HSR (IEC 62439-3 Clause 5) and PRP (IEC 62439-3 Clause 4)
- IEC 61850-3 and IEEE 1613 DNV.GL certification (pending)
- Integrated IEEE 1588v2 hardware-based BC and TC (-BC/SB version)
- Maximum 128Gbps switching capacity, 95.24Mpps throughput
- Rugged industrial design for harsh environments between -40~85°C
- Flexible modular configuration, 3 Module-dedicated slots
- Up to 24 Gigabit ports, and 4x10 Gigabit SFP Uplink slots, 1PPS BNC
- ITU-T G.8032 ERPS Ring, RSTP, or MRP (Manager/Client) redundancy
- Advanced management features such as QoS and VLAN

PRODUCT DESCRIPTION

Flexibility: ATOP's high-density RHG9528 Rack-mounted managed switch provides the flexibility needed for your application demands. You can choose from among six different Core versions: based on power supply, uplink port configurations and embedded Hardware-Assisted Boundary Clock feature. And you can choose from six different 4- or 8-Port modules to customize your device in a very simple way.

Designed for Substations: RHG9528 supports up to **24 Gigabit ports in any 8-port multiple configuration**. Specifically designed for IEC61850 substation backbone use, it is fully certified to meet all IEC61850-3 hardware requirements – such as EMC Level 3, 4 and 5 requirements, Wide temperature range and High availability.


Award-winning Performance: RHG9528's IEEE1588v2 Hardware-PTP version received recognition for nanosecond-level accuracy. This makes RHG9528 one of the most reliable GMC backups. It is also embedded with Synchronous Ethernet and with full support for PTP profiles.

High-availability, versatility and power: When equipped with **High-Availability HSR/PRP modules**, RHG9528 complies with the most stringent redundancy requirements, ensuring no packet loss and guaranteeing GOOSE packets arrive at their respective destinations. RHG9528's high performance provides a network redundant self-recovery mechanism of under 20ms on full load. This enables you to build a reliable network through almost any redundant ring topology. RHG9528 supports ITU-T G.8032 ERPS Ring, IEEE802.1D-2004 RSTP, STP, MSTP, MRP (Manager/Client), iA-Ring, iA-Chain and many other compatible ring protocols for network redundancy. With a Multifunctional web dashboard, it offers intelligent features such as Quality of service (QoS), IGMP, port mirroring, and security. It is available in two power input variants: one for low-DC voltage (redundant 24~120VDC input) and one for the more popular High-Voltage applications in the distribution grid (redundant 110~240VAC, 24~120VDC or 120~380VDC input). Additional 4 x 10 Gigabit uplink SFP slots allow RHG9528 to be the backbone of the substation.

BOUNDARY CLOCK APPLICATION

High accuracy delivered, even in holdover mode

A boundary clock, is normally a switch that doesn't act transparently to the slaves in the network. Directly connected to the Grandmaster, large networks with thousands of slaves would overload the Grandmaster. So the need for a device that acts as a slave towards the master and as a master towards slaves is achieved with a boundary clock. ATOP's RHG9528 Boundary clock, once synchronized, achieves the 50ns precision set forth in the ITU-T G.8271.1 recommendation. And it is equipped with a high-precision OCXO to guarantee that precision in the event of a link or device failure, with a maximum time-drift of 250ns per from from GNSS time. All this can guarantee a maximum 1.5us end-to-end time deviation budget from the GNSS to the end-application, up to 10 BC hierarchies.

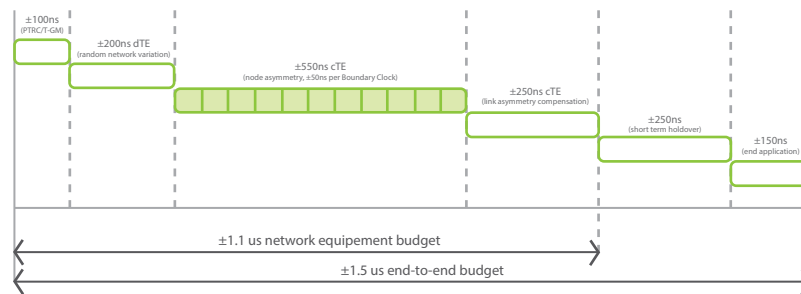


Application Example

The network diagram shows the use of ATOP's NTS7500 Grandmaster Clock and RHG9528 Boundary clock application.

RHG9528 can easily function as both Access/Aggregation switch with up to 4x1/10Gbps SFP slots and as a PTP boundary clock. Up to 28 ports can be individually configured to run different instances of IEEE1588v2.

A wide variety of settings are allowed within profiles – such as the Power and the Enterprise profiles. RHG 9528-BS supports Synchronous Ethernet, allowing the transport of time and frequency, which is important for legacy networks such as SDH-SONET.

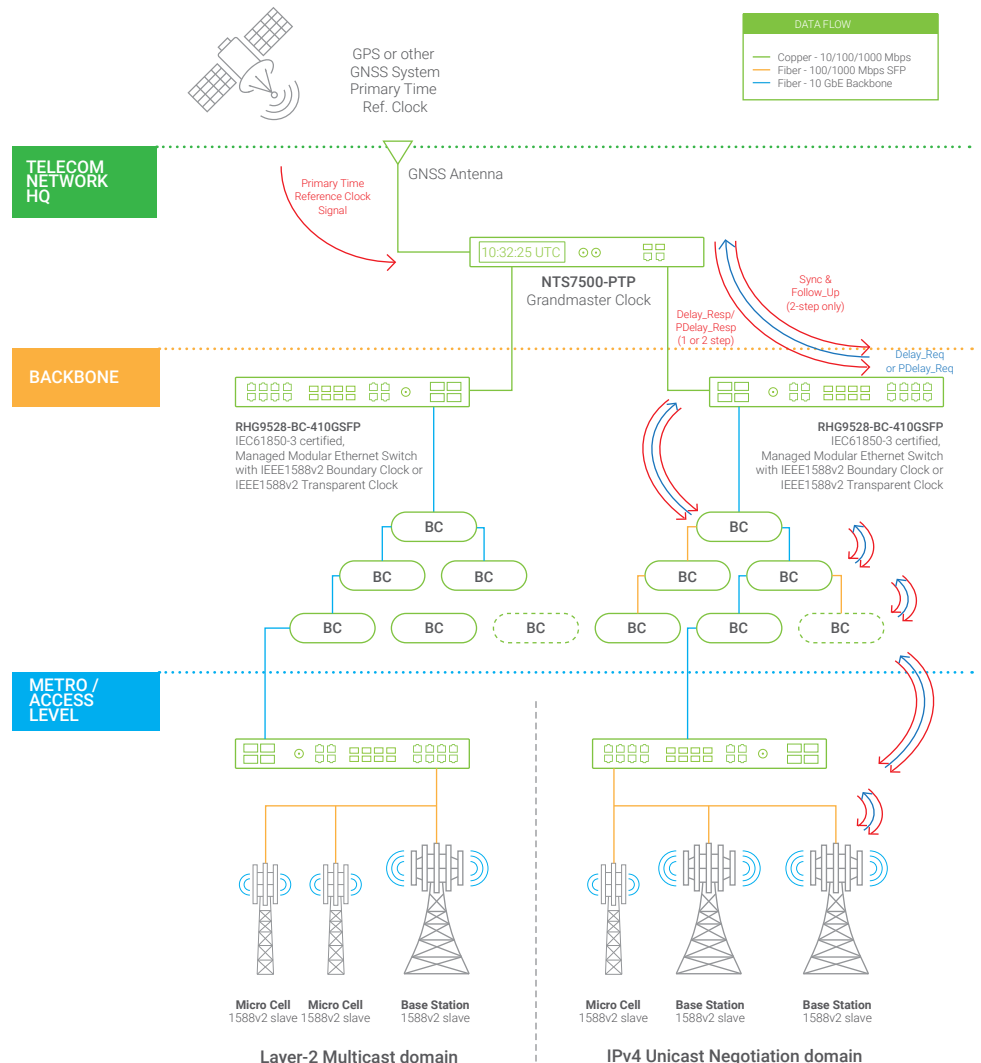


HIGH AVAILABILITY APPLICATION

Zero packet loss, on multiple ports

Install a 4-port Gigabit RJ45 or SFP High-Availability module in any of the module slots in RHG9528 CPU board, and you're good to go. Congratulations: your network is now fully compliant with IEC62439-3 Clause 4- 2016 (PRP) and IEC62439-3 Clause 5-2016 (HSR). Simultaneously. Though this 4-port module.

Through HSR/PRP technology, ATOP's device will replicate the packet through 2 redundant paths and the end-application will have the risks of losing a packet almost zeroed. This is an example of a mixed HSR/PRP network, where RHG9528 is used flexibly as a Transparent or a Boundary Clock and as an HSR/PRP manager.

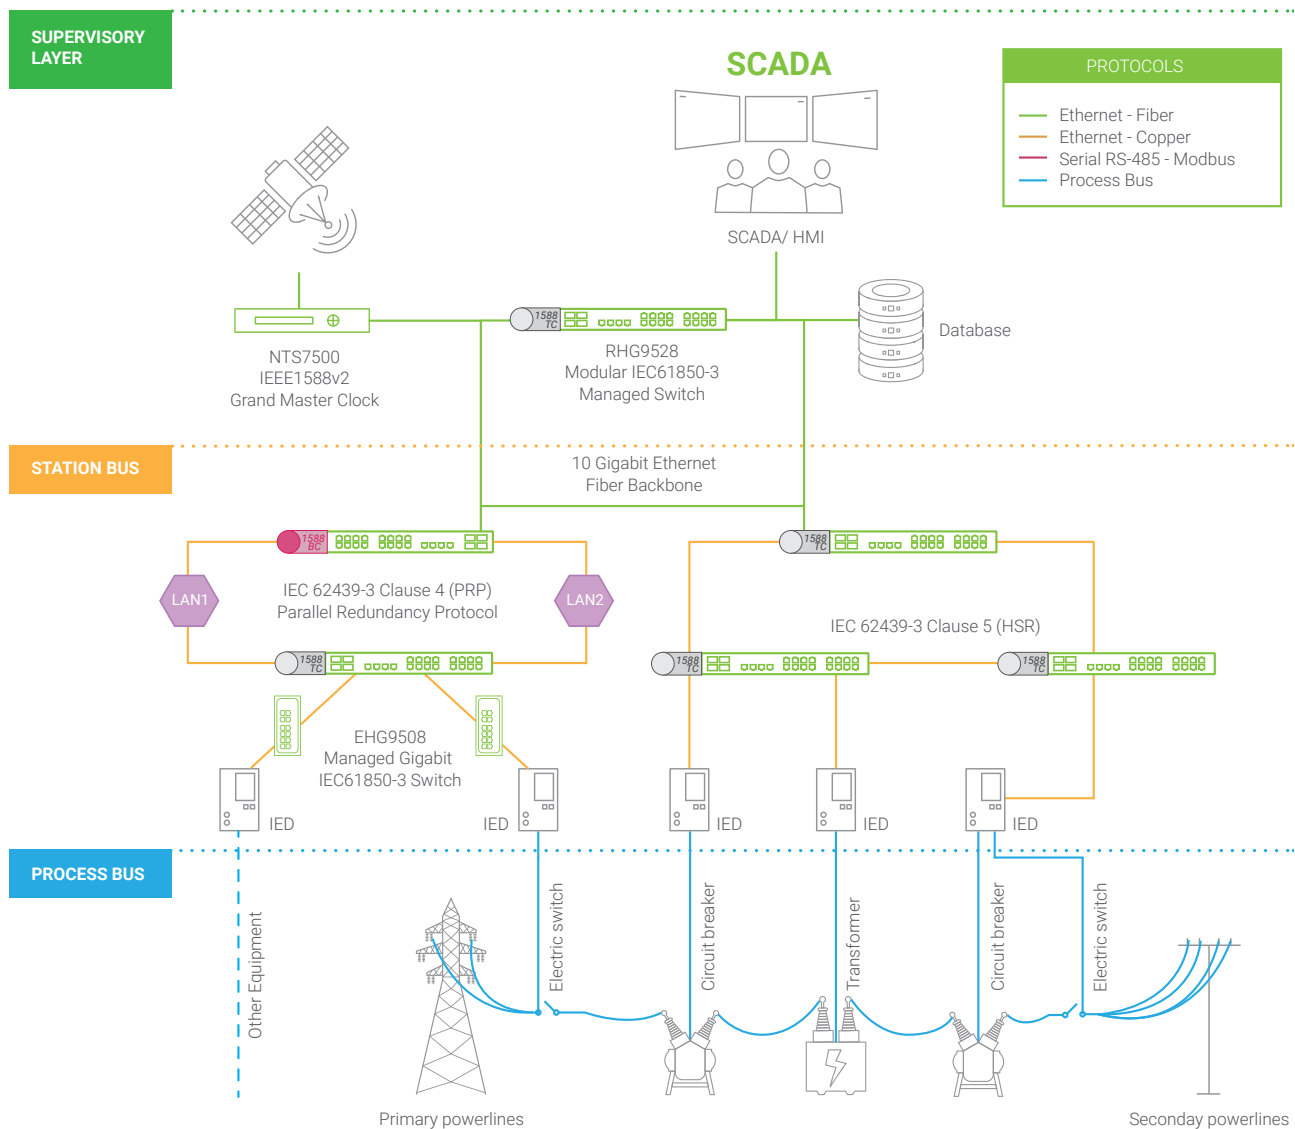

IEEE1588v2 PTP, IEC61850-9-3 Power Profile and HSR/PRP

RHG9528 is an advanced and flexible platform. It embeds high-bandwidth Switching fabric, Accurate hardware-based Boundary Clock or Transparent Clock, IEC61850-3 compliant hardware, and fully supports IEC/IEEE61850-9-3 - 2016 Power Profile. Also on HSR/PRP ports. When properly configured, our Switch can seamlessly provide Peer-to-Peer transparent clock and Boundary Clock on all ports, HSR/PRP ports included.

CONFIGURATION EXAMPLE



RHG9528-410GSFP-SB-HV Main unit, with 4x 10 Gigabit SFP uplink slots, 1PPS BNC, 120~370VDC, HW PTP BC/TC and SyncE



RHG9X28-M1
8-port Gigabit RJ45 module supporting IEEE1588v2 Hardware BC/TC.



RHG9X28-M5
4-port 10/100/1000Mbps RJ45 High-Avail. module, supporting HSR/PRP.




RHG9X28-M2
8-port Gigabit SFP module supporting IEEE1588v2 Hardware BC/TC.




IEC61850-3 certified Layer-2 Managed Switch, with 8 Gigabit ports, 4 10/100/1000 High-Availability HSR/PRP ports, 8 Gigabit SFP slots, one PPS output BNC (F) plug, and 4 x 10 Gigabit SFP uplinks, supporting IEEE1588v2 HW BC and Synchronous Ethernet.

DIMENSIONS & LAYOUT

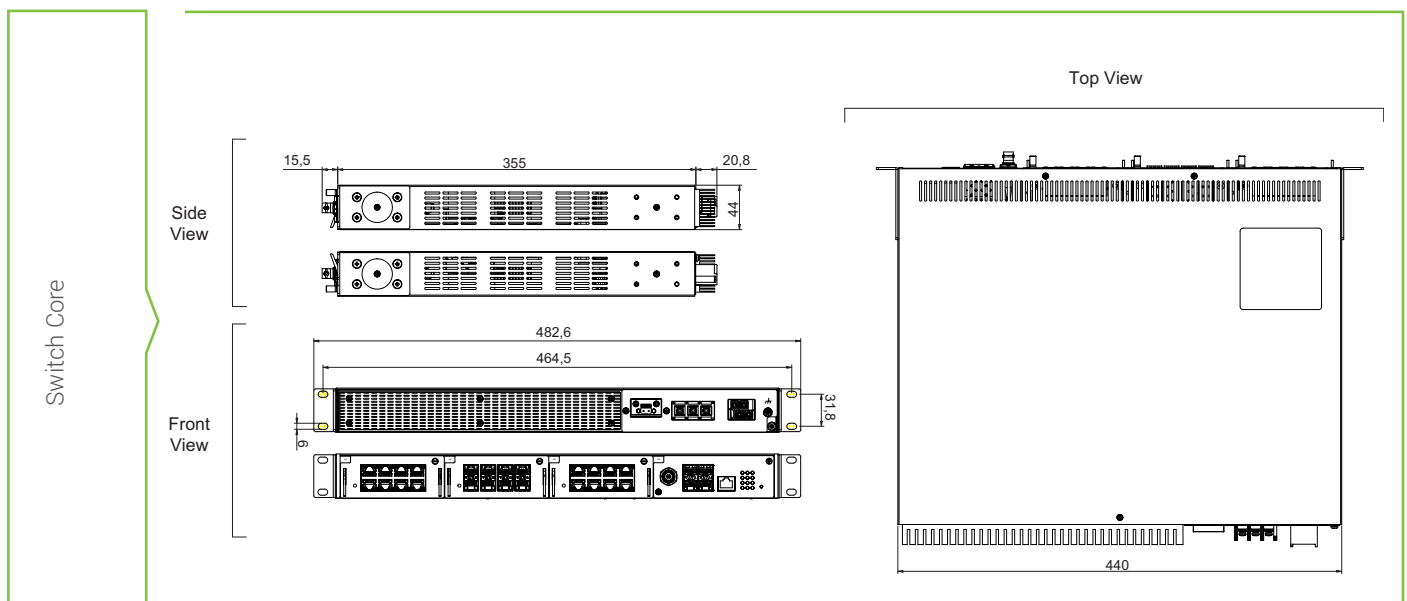

RHG9X28-M1
 RHG9X28-M2
 RHG9X28-M3
 RHG9X28-M4
 RHG9X28-M5
 RHG9X28-M6

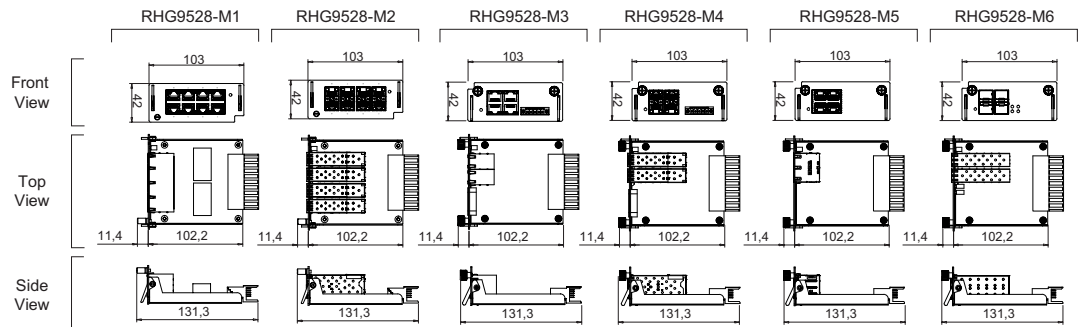

SPECIFICATIONS

| Switch core | |
|---------------------------|--|
| Model Name | RHG9528 |
| Switch Properties | |
| Priority Queues | 8 |
| VLAN Table | 512 |
| MAC-Based VLAN | 512 |
| VLAN ID Range | VID 1 to 4094 |
| Trunk Group | 8 |
| Static IGMP Groups | 128 |
| Dynamic IGMP Groups | 256 |
| MAC Table Size | 16k |
| Packet Buffer Size | 1.5 MB |
| Jumbo Frame | 9216 Byte |
| Switching Fabric Capacity | 128 Gbps |
| Maximum throughput | 95.24 Mpps |
| Ethernet | |
| Standards | IEEE 802.3 for 10BASE-T IEEE 802.3u for 100BASE-T(X) IEEE 802.3u for 100BASE-FX IEEE 802.3ab for 1000BASE-T(X) IEEE 802.3z for 1000BASE-X IEEE 802.3ae For 10 Gigabit Ethernet Fiber IEEE 802.3x for Flow Control, backpressure control IEEE 802.1D-2004 for Rapid Spanning Tree Protocol IEEE 802.1s for Multiple Spanning Tree Protocol IEEE 802.1Q for VLAN Tagging IEEE 802.1p for Class of Service IEEE 802.1X for Authentication IEEE 802.1AB Link Layer Discovery Protocol (LLDP) IEEE 802.1Q VLAN. IEEE 802.3ad for Port Trunk with LACP IEC-62439-3 Clause 4 PRP (Parallel Redundancy Protocol) IEEE1588v2 PTP (Hardware-based) - (-SB version only) ITU-T G.8261 Synchronous Ethernet |
| Protocols | IPv4, IPv6, IGMPv1/v2/v3, GMRP, GVRP, SNMPv1/v2c/v3, SNMP Inform, ICMP, Telnet, SSH, DHCP Server/Relay/Client, DHCP Option 66/67/82, BootP, TFTP, NTP Server/Client, SMTP, SMT, RMON, HTTP, HTTPS, Telnet, Syslog, MRP (Manager/Client), ERPS, LLDP, IEEE 1588 PTP V2(Hw-based), 802.1x, RADIUS, TACACS+, SyncE, HSR, PRP, Voice VLAN, sFlow |

| | | | |
|---|--|--|--|
| Redundancy | IEC62439-3 Clause 5 High-Avail-Seamless-Redundancy(HSR) only RHG9X28-M5/6 IEC62439-3 Clause 4 Parallel-Redundancy-Protocol (PRP) - only with RHG9X28-M5/6 ITU-T G.8032 ERPS, STP, RSTP, MSTP, MRP (Manager/Client), Compatible Ring/Chain, U-Ring | | |
| Automation Profiles | Modbus TCP | | |
| MIB | MIB II, IF-MIB, SNMPv2 MIB, BRIDGE-MIB, RMON MIB Group 1,2,3,9 | | |
| Precision timing | | | |
| Time Synchronization | Network Time | NTP Server/Client, SNTP | |
| | Precision Time Protocol | Std Version | IEEE1588v1 BC (SW) IEEE1588v2 BC (SW) IEEE1588v2 TC (HW)-ns accuracy |
| | | PTP (-SB) Version | IEEE1588v2 BC (HW)-ns accuracy IEEE1588v2 TC (HW)-ns accuracy Synchronous Ethernet |
| | Holdover Accuracy | Boundary Clock/ SyncE (-SB) | <30 ns/s (IEEE61850-9-3 compliant) |
| | PTP Mode (all versions) | Layer-2: Multicast, E2E/P2P, two-steps Layer-3 (IPv4):Multicast,Unicast,Unicast Neg. (E2E/P2P) | |
| | Supported Profiles (-SB version) | C37.238 -2017 Power Profile IEC/ IEEE61850-9-3 Power Profile(2016) | |
| | Additional Interfaces | RHG9528-410GSFP-BC/SB-XX support hardware-assisted BC/TC also on 4x1G or 4x10G SFP uplink slots. 1PPS square pulse issued from a 1PPS output BNC(F) | |
| Power | | | |
| Input Voltage | DC version: redundant 24~120 VDC AC version: redundant 100~240 VAC HV version: redundant 120~380 VDC | | |
| Input Current (Max) | 2.66A Max, 64W Max (For DC version models) 0.7A Max, 50/60Hz (For AC version models) 0.52A Max, 62W Max (For HVDC version models) | | |
| Power | < 70W (85°C). | | |
| Reverse polarity Protection | Yes | | |
| Relay Output | 1 Relay Output (24V/1A) | | |
| Connectors | AC: Barrier Terminal Block 4pin 9.52mm DC: Barrier Terminal Block 3Pin 13mm | | |
| Physical Characteristics | | | |
| Housing Dimension (W x H x D) Weight Installation | IP30 SPCC metal housing 440 x 44x 355 mm (not including screws, terminal blocks and rack-mount kit) 5Kg (not including module but module cover only) 1U Rack-mount, Rack-mount kit included | | |
| Environmental Limits | | | |
| Operating Temperature Storage Temperature Ambient Relative Humidity | -40°C to +75°C (-40°F to +158°F) -40°C to +85°C (-40°F to +185°F) 5% to 95%, 55°C (Non-condensing) | | |

Switch Modules



Technical Specifications

| | | | | |
|-------------------|--|--|--|--|
| Description | 8-Port RJ45 module | 8-Port SFP module | 4-Port RJ45 with IRIG-B module | 4-port SFP with IRIG-B module |
| Model Name | RHG9X28-M1 | RHG9X28-M2 | RHG9X28-M3 | RHG9X28-M4 |
| Properties | | | | |
| Port speed | 10/100/1000 Mbps | 100/1000 Mbps | 10/100/1000 Mbps | 100/1000 Mbps |
| Interface | RJ45 | SFP Slot | RJ45 | SFP Slot |
| HW PTP IEEE1588v2 | TC/BC (with -BC core) SyncE (with -SB core) | TC/BC (with -BC core) SyncE (with -SB core) | TC/BC (with -BC core) SyncE (with -SB core) | TC/BC (with -BC core) SyncE (with -SB core) |
| HSR/PRP | No | No | Yes, Terminal Block | Yes, Terminal Block |
| Dimensions | 102 x 120 x 42 mm | 102 x 120 x 42 mm | 102 x 120 x 42 mm | 102 x 120 x 42 mm |
| Weight | 550 g | 500 g | 550 g | 500 g |
| Fixing | 2 x quick-release screws (included) | 2 x quick-release screws (included) | 2 x quick-release screws (included) | 2 x quick-release screws (included) |



Technical Specifications

| | | |
|-------------------|-------------------------------------|-------------------------------------|
| Description | 4-Port RJ45 HSR/PRP module | 4-Port SFP HSR/PRP module |
| Model Name | RHG9X28-M5 | RHG9X28-M6 |
| Properties | | |
| Port speed | 10/100/1000 Mbps | 100/1000 Mbps |
| Interface | RJ45 | SFP Slot |
| HW PTP IEEE1588v2 | TC/BC (with -BC core) | TC/BC (with -BC core) |
| IRIG-B | 2 Groups | 2 Groups |
| Dimensions | 102 x 120 x 42 mm | 102 x 120 x 42 mm |
| Weight | 550 g | 500 g |
| Fixing | 2 x quick-release screws (included) | 2 x quick-release screws (included) |

REGULATORY APPROVALS

| Regulatory Approvals | | | | |
|----------------------------|---|-------------------|---|-------|
| Safety | UL/EN/IEC(CB) 60950/62368 | | | |
| EMC | FCC Part 15, Subpart B, Class A, EN 55032, EN 55024, EN 61000-6-4:2007+A1 2011, EN 61000-3-2, EN 61000-3-3, EN 61000-6-2:2005 | | | |
| Power Automation | IEC61850-3, IEEE 1613 | | | |
| Test | Item | | Value | Level |
| IEC 61000-4-2 | ESD | Contact Discharge | ±8KV | 4 |
| | | Air Discharge | ±15KV | 4 |
| IEC 61000-4-3 | RS | Enclosure Port | 10(V/m), 80-1000MHz, 80% AM, 1~3GHz | 3 |
| IEC 61000-4-4 | EFT | AC Power Port | ±4.0kV @2.5kHz | 4 |
| | | DC Power Port | ±4.0kV @2.5kHz | 4 |
| | | Signal Port | ±2.0KV @2.5kHz | 4 |
| IEC 61000-4-5 | Surge | AC Power Port | Line-to Line±2.0kV | 4 |
| | | AC Power Port | Line-to Earth±4.0kV | 4 |
| | | DC Power Port | Line-to Line±1.0kV | 3 |
| | | DC Power Port | Line-to Earth±2.0kV | 3 |
| | | Signal Port | Line-to Earth±4.0kV | 4 |
| IEC 61000-4-6 | CS | AC Power Port | 10V rms 0.15-80MHz, 80% AM | 3 |
| | | DC Power Port | 10V rms 0.15-80MHz, 80% AM | 3 |
| | | Signal Port | 10V rms 0.15-80MHz, 80% AM | 3 |
| IEC 61000-4-8 | PFMF | (Enclosure) | 100A/m continuous, 1000A/m (3s) | 5 |
| IEC 61000-4-10 | Damped Osc. Magnetic Field | (Enclosure) | 100A/m, 100kHz, 1MHz | 5 |
| IEC 61000-4-11 | DIP | AC Power Port | Drop 70% 3 times/s (1period) Drop 40% 3 times/1ms (50 period) Drop 100% 3 times/50m(5-50per.) | - |
| IEC 61000-4-12 | Damped Oscillatory | AC Power Port | 2.5kV common,1kV diff.mode | 3 |
| | | Signal Port | 2.5kV common,1kV diff.mode | 3 |
| Shock Drop Vibration | MIL-STD-810G Method 516.5 MIL-STD-810F Method 516.5 MIL-STD-810F Method 514.5 C-1 & C-2 | | | |
| RoHS2 | Yes | | | |
| MTBF | 20 years | | | |
| Warranty | 5 years | | | |

ORDERING INFORMATION

Main core switch ordering information

| Model name | Part Number | Description |
|-----------------------|-----------------|--|
| RHG9528-410GSFP-DC | 1P1RHG95280004G | 4*10G,SFP,2DC |
| RHG9528-410GSFP-AC | 1P1RHG95280006G | 4*10G,SFP,2AC |
| RHG9528-410GSFP-HV | 1P1RHG95280005G | 4*10G,SFP,2HV |
| RHG9528-410GSFP-SB-DC | 1P1RHG9528000GG | 4*10G,SFP,2DC,Support HW-Boundary Clock/ SyncE |
| RHG9528-410GSFP-SB-AC | 1P1RHG9528000KG | 4*10G,SFP,2AC,Support HW-Boundary Clock/ SyncE |
| RHG9528-410GSFP-SB-HV | 1P1RHG9528000IG | 4*10G,SFP,2HV,Support HW-Boundary Clock/ SyncE |

Modules ordering information

| Model name | Part Number | Description |
|------------|-----------------|-------------------------------|
| RHG9X28-M1 | 1P1RHG9X28M101G | 8P*1000TX RJ45 Module |
| RHG9X28-M2 | 1P1RHG9X28M201G | 8P*1000FX SFP Module |
| RHG9X28-M3 | 1P1RHG9X28M301G | 4P,RJ45 Module and IRIG-B(TB) |
| RHG9X28-M4 | 1P1RHG9X28M401G | 4P,SFP Module and IRIG-B(TB) |
| RHG9X28-M5 | 1P1RHG9X28M501G | 4P,RJ45 Module with HSR/PRP |
| RHG9X28-M6 | 1P1RHG9X28M601G | 4P,SFP Module with HSR/PRP |

Optional Accessories

| Model name | Part Number | Description |
|-------------------|-----------------|--|
| AC POWER CORD(US) | 50891741G | RHG9X28 US AC Power CORD, 183cm |
| AC POWER CORD(EU) | 50891751G | RHG9X28 EU AC Power CORD, 180cm |
| SDR-240-48 | 50502401480001G | DIN RAIL POWER SUPPLY / T, AC 100~240V to 48V~55V DC 5A, 240W |
| SDR-480-48 | 50504801480001G | DIN RAIL POWER SUPPLY / T, AC 100~240V to 48V~55V DC 10A, 480W |
| AXFD-1314-0523 | 522AXFD1314001G | SFP Transceiver, 155Mbps, Multi-mode,1310nm, 2km, -40°C to +85°C, DDMI |
| AXFD-1314-0553 | 522AXFD1314011G | SFP Transceiver, 155Mbps, Single-mode, 1310nm,30km, -40°C to +85°C, DDMI |
| AXGD-5854-0513 | 522AXGD5854001G | SFP Transceiver, 1250Mbps, 850nm, Multi-mode, 550m, 3.3V, -40°C to +85°C, DDMI |
| AXGD-1354-0523 | 522AXGD1354001G | SFP Transceiver, 1250Mbps, 1310nm, Multi-mode, 2km, 3.3V, -40°C to +85°C, DDMI |
| AXGD-1354-0533 | 522AXGD1354011G | SFP Transceiver, 1250Mbps, 1310nm, Single-mode, 10km, 3.3V, -40°C to +85°C, DDMI |
| AXGD-3354-0593 | 522AXGD3354001G | SFP Transceiver, 1250Mbps, 1310nm, Single-mode, 40km, 3.3V, -40°C to +85°C, DDMI |
| AXXE-5886-05B3 | 522AXXE5886001G | SFP Transceiver, 10Gbps Multi, 850nm,300m, -40°C to +85°C |