



FEATURED HIGHLIGHTS

- Supports HSR (IEC 62439-3 Clause 5) and PRP (IEC 62439-3 Clause 4)
- IEC 61850-3 and IEEE 1613 certification
- Integrated IEEE 1588v2 hardware-based BC and TC (-BC/SB version)
- Maximum 128Gbps switching capacity, 95.24Mpps throughput
- Rugged industrial design for harsh environments between -40°C to +85°C
- Flexible modular configuration, 3 Module-dedicated slots
- Up to 24 Gigabit ports, and 4x10 Gigabit SFP Uplink slots, 1PPS BNC
- ITU-T G.8032 ERPS Ring, RSTP, or MRP (Manager/ Client) redundancy
- Advanced management features such as QoS and VLAN

PRODUCT DESCRIPTION

Flexibility: ATOP's high-density RHG9628 Rack-mounted managed switch provides the flexibility needed for your application demands. You can choose from among six different Core versions: based on power supply, uplink port configurations and embedded Hardware-Assisted Boundary Clock feature. And you can choose from six different 4- or 8-Port modules to customize your device in a very simple way.

Designed for Substations: Layer-3 routing support BGPv4, IPv4 static routing, RIP v1/v2 and OSPFv2.


Award-winning Performance: RHG9628's IEEE1588v2 Hardware-PTP version received recognition for nanosecond-level accuracy. This makes RHG9628 one of the most reliable GMC backups. And being embedded with Synchronous Ethernet and with full support for PTP profiles.

High-availability, versatility and power: When equipped with *High-Availability HSR/PRP modules*, RHG9628 complies with the most stringent redundancy requirements, ensuring no packet loss and guaranteeing GOOSE packets arrive at their respective destinations. RHG9628's high performance provides a network redundant self-recovery mechanism of under 20ms on full load. This enables you to build a reliable network through almost any redundant ring topology. RHG9628 supports ITU-T G.8032 ERPS Ring, IEEE802.1D-2004 RSTP, STP, MSTP, MRP (Manager/ Client), iA-Ring, iA-Chain and many other compatible ring protocols for network redundancy. With a Multifunctional web dashboard, its offers intelligent features such as Quality of service (QoS), IGMP, port mirroring, and security. It is available in two power input variants: one for low-DC voltage (redundant 24~120VDC input) and one for the more popular High-Voltage applications in the distribution grid (redundant 110~240VAC, 24~120VDC or 120~380VDC input). Additional 4 x 10 Gigabit uplink SFP slots allow RHG9628 to be the backbone of the substation.

BOUNDARY CLOCK APPLICATION

High accuracy delivered, even in holdover mode

A boundary clock, is normally a switch that doesn't act transparently to the slaves in the network. Directly connected to the Grandmaster, large networks with thousands of slaves would overload the Grandmaster. So the need for a device that acts as a slave towards the master and as a master towards slaves is achieved with a boundary clock. ATOP's RHG9628 Boundary clock, once synchronized, achieves the 50ns precision set forth in the ITU-T G.8271.1 recommendation. And it is equipped with a high-precision OCXO to guarantee that precision in the event of a link or device failure, with a maximum time-drift of 250ns from GNSS time. All this can guarantee a maximum 1.5us end-to-end time deviation budget from the GNSS to the end-application, up to 10 BC hierarchies.

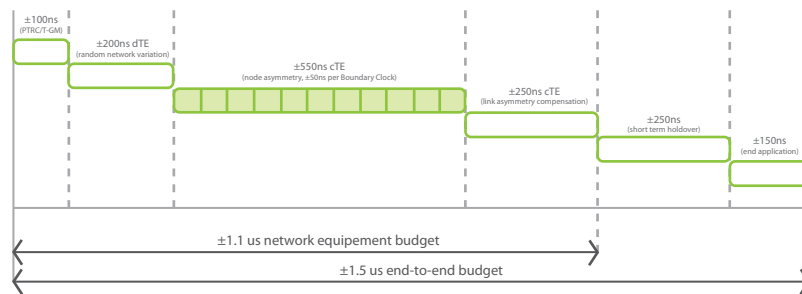


Application Example

The network diagram shows the use of ATOP's NTS7500 Grandmaster Clock and RHG9628 Boundary clock application.

RHG9628 can easily function as a both Access/Aggregation switch with up to 4x1/10Gbps SFP slots and as a PTP boundary clock. Up to 28 ports can be individually configured to run different instances of IEEE1588v2.

A wide variety of settings are allowed within profiles – such as the Power, and Enterprise profiles. RHG 9628-BS supports Synchronous Ethernet, allowing the transport of time and frequency, which is important for legacy networks such as SDH-SONET.

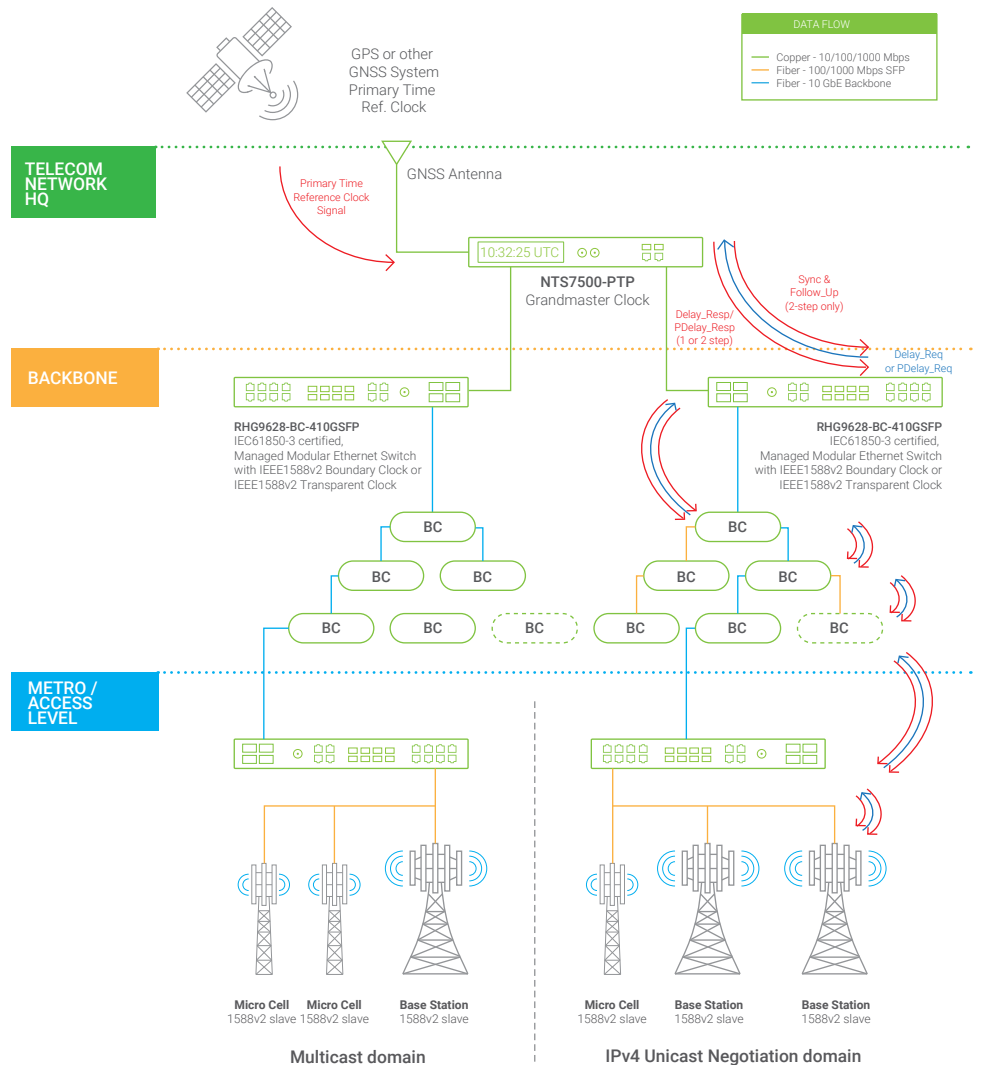


HIGH AVAILABILITY APPLICATION

Zero packet loss, on multiple ports

Install a 4-port Gigabit RJ45 or SFP High-Availability module in any of the module slots in RHG9628 CPU board, and you're good to go. Congratulations: your network is now fully compliant with IEC62439-3 Clause 4- 2016 (PRP) and IEC62439-3 Clause 5-2016 (HSR). Simultaneously. Though this 4-port module.

Through HSR/PRP technology, ATOP's device will replicate the packet through 2 redundant paths and the end-application will have the risks to lose a packet almost zeroed. This is an example of a mixed HSR/PRP network, where RHG9628 is used flexibly as a Transparent or a Boundary Clock and as an HSR/PRP manager.

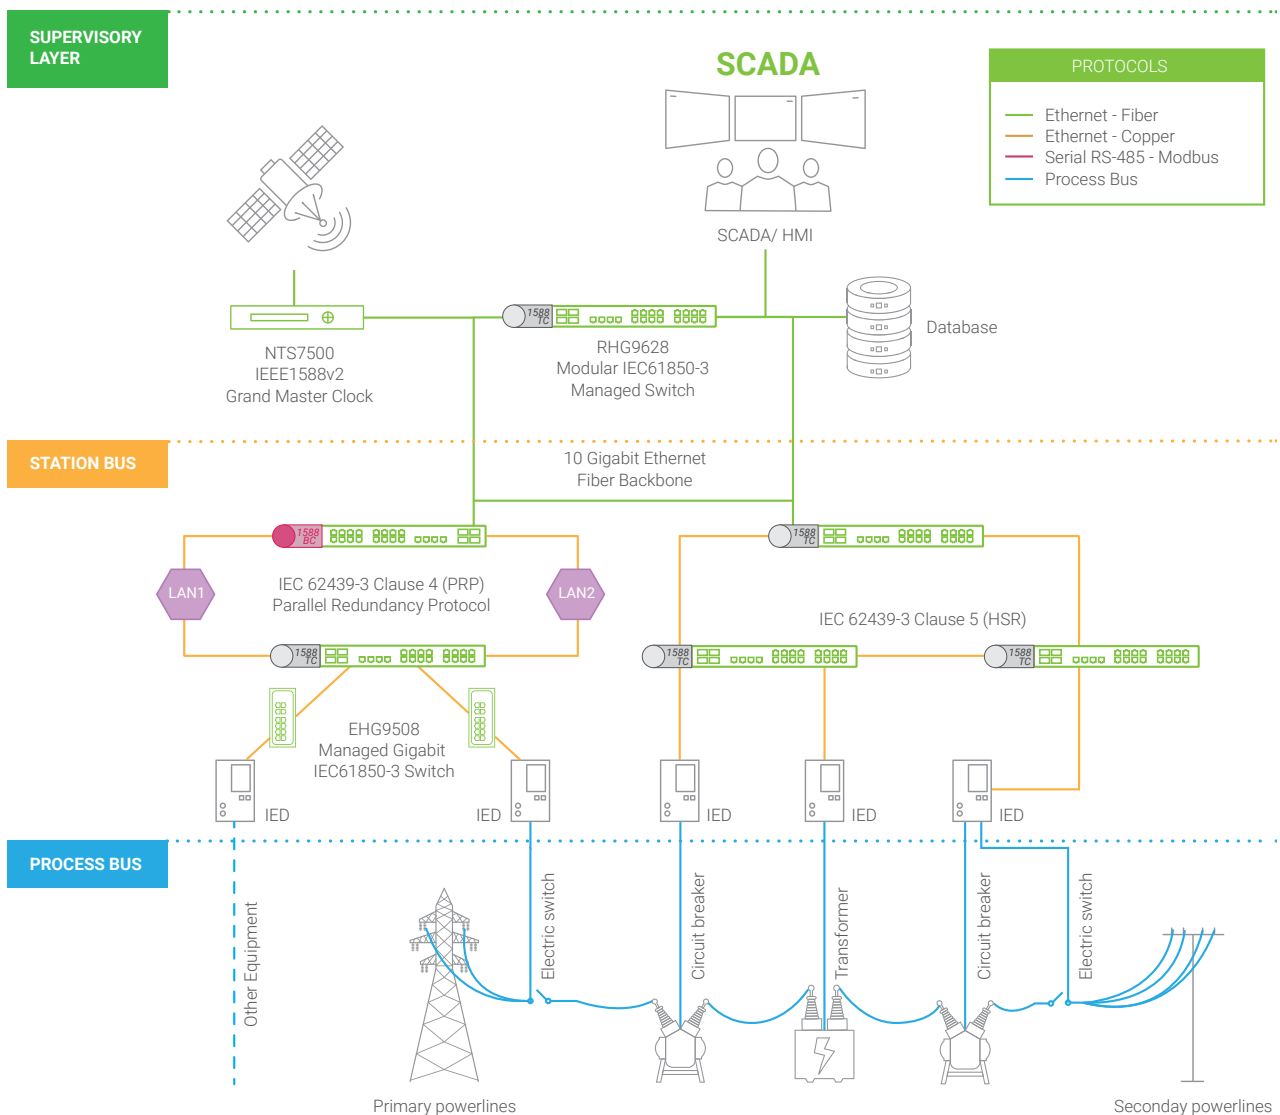

IEEE1588v2 PTP, IEC61850-9-3 Power Profile and HSR/PRP

RHG9628 is an advanced and flexible platform. It embeds high-bandwidth Switching fabric, Accurate hardware-based Boundary Clock or Transparent Clock, IEC61850-3 compliant hardware, and fully supports IEC/IEEE61850-9-3 - 2016 Power Profile. Also on HSR/PRP ports. When properly configured, our Switch can seamlessly provide Peer-to-Peer transparent clock and Boundary Clock on all ports, HSR/PRP ports included.

CONFIGURATION EXAMPLE



RHG9628-410GSFP-SB-HV Main unit, with 4x 10 Gigabit SFP uplink slots, 1PPS BNC, 120-380VDC, HW PTP BC/TC and SyncE



RHG9X28-M1
8-port Gigabit RJ45 module supporting IEEE1588v2 Hardware BC/TC.



RHG9X28-M5
4-port 10/100/1000Mbps RJ45 High-Avail. module, supporting HSR/PRP.




RHG9X28-M2
8-port Gigabit SFP module supporting IEEE1588v2 Hardware BC/TC.




IEC61850-3 certified Layer-3 Managed Switch, with 8 Gigabit ports, 4 10/100/1000 High-Availability HSR/PRP ports, 8 Gigabit SFP slots, one PPS output BNC (F) plug, and 4 x 10 Gigabit SFP uplinks, supporting IEEE1588v2 HW BC and Synchronous Ethernet.

DIMENSIONS & LAYOUT

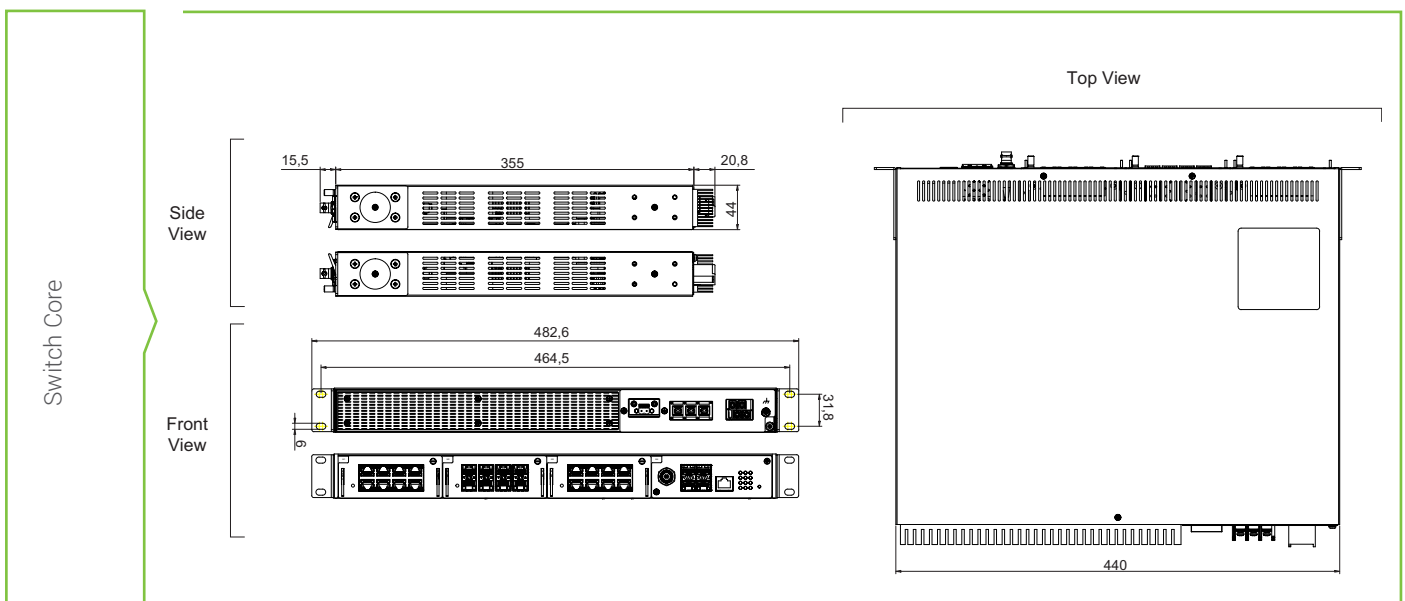

RHG9X28-M1
 RHG9X28-M2
 RHG9X28-M3
 RHG9X28-M4
 RHG9X28-M5
 RHG9X28-M6

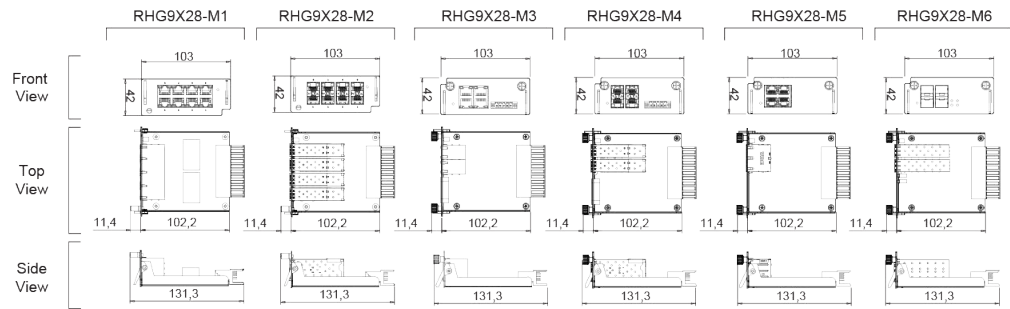

SPECIFICATIONS

Switch core

Model Name RHG9628

Switch Properties

| | |
|---------------------------|---------------|
| Priority Queues | 8 |
| VLAN Table | 512 |
| MAC-Based VLAN | 512 |
| VLAN ID Range | VID 1 to 4094 |
| Trunk Group | 8 |
| Static IGMP Groups | 128 |
| Dynamic IGMP Groups | 256 |
| MAC Table Size | 16k |
| Packet Buffer Size | 1.5 MB |
| Jumbo Frame | 9216 Byte |
| Switching Fabric Capacity | 128 Gbps |
| Maximum throughput | 95.24 Mpps |

Ethernet

Standards

- IEEE 802.3 for 10BASE-T
- IEEE 802.3u for 100BASE-T(X)
- IEEE 802.3u for 100BASE-FX
- IEEE 802.3ab for 1000BASE-T(X)
- IEEE 802.3z for 1000BASE-X
- IEEE 802.3ae For 10 Gigabit Ethernet Fiber
- IEEE 802.3x for Flow Control, backpressure control
- IEEE 802.1D-2004 for Rapid Spanning Tree Protocol
- IEEE 802.1s for Multiple Spanning Tree Protocol
- IEEE 802.1Q for VLAN Tagging
- IEEE 802.1p for Class of Service
- IEEE 8021X for Authentication
- IEEE 802.1AB Link Layer Discovery Protocol (LLDP)
- IEEE 802.1Q VLAN.
- IEEE 802.3ad for Port Trunk with LACP
- IEC-62439-3 Clause 4 PRP (Parallel Redundancy Protocol)
- IEEE1588v2 PTP (Hardware-based) - (-SB version only)
- ITU-T G.8261 Synchronous Ethernet

| | | | |
|--|--|--|--|
| Protocols | IPv4, IPv6, IGMPv1/v2/v3, GMRP, GVRP, SNMPv1/v2c/v3, SNMP Inform, ICMP, Telnet, SSH, DHCP Server/Relay/Client, DHCP Option 66/67/82, Bootp, TFTP, NTP Server/Client, SNTP, SMTP, RMON, HTTP, HTTPS, Telnet, Syslog, MRP(Manager/Client), ERPS, LLDP, IEEE 1588 PTP V2(Hw-based), 802.1x, RADIUS, TACACS+, SyncE, HSR, PRP, ACL, DHCP Snooping, ARP Spoof Prevention, Dynamic ARP Inspection, MLD, UDLD, IP Source Guard, sFlow | | |
| Layer-3 Switching Protocols | Routing: static routing, RIP v1/v2, OSPFv2, BGPv4 Multicast: IGMPv1/v2/v3, DVMRP, PIM-DM, PIM-SM, PIM-SSM Routing Redundancy: VRRP (Virtual Router Redundancy Protocol) | | |
| Redundancy | IEC62439-3 Clause 5 High-Avail-Seamless-Redundancy(HSR) only RH-G9X28-M5/6 IEC62439-3 Clause 4 Parallel-Redundancy-Protocol (PRP) - only with RH-G9X28-M5/6 ITU-T G.8032 ERPS, STP, RSTP, MSTP, MRP, Compatible Ring/Chain, U-Ring | | |
| Automation Profiles | Modbus TCP | | |
| MIB | MIB II, IF-MIB, SNMPv2 MIB, BRIDGE-MIB, RMON MIB Group 1,2,3,9 | | |
| Precision timing | | | |
| Time Synchronization | Network Time | NTP Server/Client, SNTP | |
| | Precision Time Protocol | Std Version | IEEE1588v1 BC (SW) IEEE1588v2 BC (SW) IEEE1588v2 TC (HW)-ns accuracy |
| | | PTP (-SB) Version | IEEE1588v2 BC (HW)-ns accuracy IEEE1588v2 TC (HW)-ns accuracy Synchronous Ethernet |
| | Holdover Accuracy | Boundary Clock/SyncE (-SB) | <30 ns/s (IEEE61850-9-3 compliant) |
| | PTP Mode (all versions) | Layer-2: Multicast, E2E/P2P, two-steps Layer-3 (IPv4):Multicast,Unicast,Unicast Neg. (E2E/P2P) | |
| | Supported Profiles (-SB version) | C37.238 -2017 Power Profile IEC/ IEEE61850-9-3 Power Profile(2016) | |
| | Additional Interfaces | RHG9528-410GSFP-BC/SB-XX support hardware-assisted BC/TC also on 4x1G or 4x10G SFP uplink slots. 1PPS square pulse issued from a 1PPS output BNC(F) | |
| Power | | | |
| Input Voltage | DC version: redundant 24~120 VDC AC version: redundant 110~240 VAC HV version: redundant 120~380 VDC | | |
| Input Current (Max) | 2.66A Max, 64W Max (For DC version models) 0.7A Max, 50/60Hz (For AC version models) 0.52A Max, 62W Max (For HVDC version models) | | |
| Power | < 70W (85°C). | | |
| Reverse polarity Protection | Yes | | |
| Relay Output | 1 Relay Output (24V/1A) | | |
| Connectors | AC: Barrier Terminal Block 4pin 9.52mm DC: Barrier Terminal Block 3Pin 13mm | | |
| Physical Characteristics | | | |
| Housing Dimension (W x H x D) Weight Installation | IP30 SPCC metal housing 440 x 44x 355 mm (not including screws, terminal blocks and rack-mount kit) 5Kg (not including module but module cover only) 1U Rack-mount, Rack-mount kit included | | |

Environmental Limits

| | |
|---------------------------|----------------------------------|
| Operating Temperature | -40°C to +75°C (-40°F to +158°F) |
| Storage Temperature | -40°C to +85°C (-40°F to +185°F) |
| Ambient Relative Humidity | 5% to 95%, 55°C (Non-condensing) |

Switch Modules



Technical Specifications

| | | | | |
|-------------------|--|--|--|--|
| Description | 8-Port RJ45 module | 8-Port SFP module | 4-Port RJ45 with IRIG-B module | 4-port SFP with IRIG-B module |
| Model Name | RHG9X28-M1 | RHG9X28-M2 | RHG9X28-M3 | RHG9X28-M4 |
| Properties | | | | |
| Port speed | 10/100/1000 Mbps | 100/1000 Mbps | 10/100/1000 Mbps | 100/1000 Mbps |
| Interface | RJ45 | SFP Slot | RJ45 | SFP Slot |
| HW PTP IEEE1588v2 | TC/BC (with -BC core) SyncE (with -SB core) | TC/BC (with -BC core) SyncE (with -SB core) | TC/BC (with -BC core) SyncE (with -SB core) | TC/BC (with -BC core) SyncE (with -SB core) |
| HSR/PRP | No | No | Yes, Terminal Block | Yes, Terminal Block |
| Dimensions | 102 x 120 x 42 mm | 102 x 120 x 42 mm | 102 x 120 x 42 mm | 102 x 120 x 42 mm |
| Weight | 550 g | 500 g | 550 g | 500 g |
| Fixing | 2 x quick-release screws (included) | 2 x quick-release screws (included) | 2 x quick-release screws (included) | 2 x quick-release screws (included) |



Technical Specifications

| | | |
|-------------------|-------------------------------------|-------------------------------------|
| Description | 4-Port RJ45 HSR/PRP module | 4-Port SFP HSR/PRP module |
| Model Name | RHG9X28-M5 | RHG9X28-M6 |
| Properties | | |
| Port speed | 10/100/1000 Mbps | 100/1000 Mbps |
| Interface | RJ45 | SFP Slot |
| HW PTP IEEE1588v2 | TC/BC (with -BC core) | TC/BC (with -BC core) |
| IRIG-B | 2 Groups | 2 Groups |
| Dimensions | 102 x 120 x 42 mm | 102 x 120 x 42 mm |
| Weight | 550 g | 500 g |
| Fixing | 2 x quick-release screws (included) | 2 x quick-release screws (included) |

REGULATORY APPROVALS

| Regulatory Approvals | | | | |
|----------------------------|--|------------------------|---|----------------------|
| Safety | UL/EN/IEC(CB) 62368-1 | | | |
| EMC | FCC Part 15, Subpart B, Class A, EN 55032, EN55035, EN 61000-6-4:2007+A1 2011, EN 61000-3-2, EN 61000-3-3, EN 61000-6-2:2005 | | | |
| Power Automation | IEC61850-3, IEEE 1613 | | | |
| Test | Item | | Value | Level |
| IEC 61000-4-2 | ESD | Contact Discharge | ±8KV | 4 |
| | | Air Discharge | ±15KV | 4 |
| IEC 61000-4-3 | RS | Enclosure Port | 10(V/m), 80-1000MHZ, 80% AM, 1~3GHz | 3 |
| IEC 61000-4-4 | EFT | AC Power Port | ±4.0kV @5.0kHz | 4 |
| | | DC Power Port | ±4.0kV @5.0kHz | 4 |
| | | Signal Port | ±4.0kV @5.0kHz | 4 |
| IEC 61000-4-5 | Surge | AC Power Port | Line-to Line±2.0kV | 4 |
| | | AC Power Port | Line-to Earth±4.0kV | 4 |
| | | DC Power Port | Line-to Line±1.0kV | 3 |
| | | DC Power Port | Line-to Earth±2.0kV | 3 |
| | | Signal Port | Line-to Earth±4.0kV | 4 |
| IEC 61000-4-6 | CS | AC Power Port | 10V rms 0.15-80MHZ, 80% AM | 3 |
| | | DC Power Port | 10V rms 0.15-80MHZ, 80% AM | 3 |
| | | Signal Port | 10V rms 0.15-80MHZ, 80% AM | 3 |
| IEC 61000-4-8 | PFMF | (Enclosure) | 100A/m continuous, 1000A/m (1s) | 5 |
| IEC 61000-4-11 | DIP | AC Power Port | Drop 70% 3 times/s (1period) Drop 40% 3 times/1ms (50 period) Drop 100% 3 times/50m(5-50per.) | - |
| IEC 61000-4-16 | Main | DC Input / Output | 30V continuous, / 300V 1S | 4 |
| | Frequency | Signal Port | 30V continuous, / 300V 1S | 4 |
| IEC 61000-4-17 | Ripple | DC Input / Output | 10% of unit (10% Level3) | 3 |
| IEC 61000-4-18 | Damped | AC Power Port | Line-to-Line ±1.0KV | 3 |
| | | | Line-to-Earth ±2.5KV | 3 |
| | Oscillatory | DC Power Port | Line-to-Line ±1.0KV | 3 |
| | | | Line-to-Earth ±2.5KV | 3 |
| | | | Signal Port | Line-to-Earth ±2.5KV |
| IEC 61000-4-29 | DC Input Port | Dips and Interruptions | 30% Reduction: 0.1 sec | N/A |
| | | | 60% Reduction: 0.1 sec | N/A |
| | | | 100% Reduction: 0.05 sec | N/A |
| Shock Drop Vibration | MIL-STD-810G Method 516.7 (2014) MIL-STD-810F Method 516.7 (2014) MIL-STD-810F Method 514.7 C-1 & C-III Category 4(2014) | | | |
| RoHS2 | Yes | | | |
| MTBF | 20 years | | | |
| Warranty | 5 years | | | |

ORDERING INFORMATION

Main core switch ordering information

| Model name | Part Number | Description |
|-----------------------|-----------------|---|
| RHG9628-410GSFP-DC | 1P1RHG96280004G | 4*10G, SFP, 2DC |
| RHG9628-410GSFP-AC | 1P1RHG96280006G | 4*10G, SFP, 2AC |
| RHG9628-410GSFP-HV | 1P1RHG96280005G | 4*10G, SFP, 2HV |
| RHG9628-410GSFP-SB-DC | 1P1RHG9628000GG | 4*10G, SFP, 2DC, Support HW-Boundary Clock/ SyncE |
| RHG9628-410GSFP-SB-AC | 1P1RHG9628000KG | 4*10G, SFP, 2AC, Support HW-Boundary Clock/ SyncE |
| RHG9628-410GSFP-SB-HV | 1P1RHG9628000IG | 4*10G, SFP, 2HV, Support HW-Boundary Clock/ SyncE |

Modules ordering information

| Model name | Part Number | Description |
|------------|-----------------|--------------------------------|
| RHG9X28-M1 | 1P1RHG9X28M101G | 8P*1000TX RJ45 Module |
| RHG9X28-M2 | 1P1RHG9X28M201G | 8P*1000FX SFP Module |
| RHG9X28-M3 | 1P1RHG9X28M301G | 4P, RJ45 Module and IRIG-B(TB) |
| RHG9X28-M4 | 1P1RHG9X28M401G | 4P, SFP Module and IRIG-B(TB) |
| RHG9X28-M5 | 1P1RHG9X28M501G | 4P, RJ45 Module with HSR/PRP |
| RHG9X28-M6 | 1P1RHG9X28M601G | 4P, SFP Module with HSR/PRP |

Optional Accessories

| Model name | Part Number | Description |
|-------------------|-----------------|--|
| AC POWER CORD(US) | 50891741G | RHG9X28 US AC Power CORD, 183cm |
| AC POWER CORD(EU) | 50891751G | RHG9X28 EU AC Power CORD, 180cm |
| SDR-240-48 | 50502401480001G | DIN RAIL POWER SUPPLY / T, AC 100~240V to 48V to 55V DC 5A, 240W |
| SDR-480-48 | 50504801480001G | DIN RAIL POWER SUPPLY / T, AC 100~240V to 48V to 55V DC 10A, 480W |
| AXFD-1314-0523 | 522AXFD1314001G | SFP Transceiver, 155Mbps, Multi-mode, 1310nm, 2km, -40°C to +85°C, DDMI |
| AXFD-1314-0553 | 522AXFD1314011G | SFP Transceiver, 155Mbps, Single-mode, 1310nm, 30km, -40°C to +85°C, DDMI |
| AXGD-5854-0513 | 522AXGD5854001G | SFP Transceiver, 1250Mbps, 850nm, Multi-mode, 550m, 3.3V, -40°C to +85°C, DDMI |
| AXGD-1354-0523 | 522AXGD1354001G | SFP Transceiver, 1250Mbps, 1310nm, Multi-mode, 2km, 3.3V, -40°C to +85°C, DDMI |
| AXGD-1354-0533 | 522AXGD1354011G | SFP Transceiver, 1250Mbps, 1310nm, Single-mode, 10km, 3.3V, -40°C to +85°C, DDMI |
| AXGD-3354-0593 | 522AXGD3354001G | SFP Transceiver, 1250Mbps, 1310nm, Single-mode, 40km, 3.3V, -40°C to +85°C, DDMI |
| AXXE-5886-05B3 | 522AXXE5886001G | SFP Transceiver, 10Gbps Multi, 850nm, 300m, -40°C to +85°C |