



FEATURE HIGHLIGHTS

- Wi-Fi 5 2x2 MU-MIMO with 802.11ac peak speed 867 Mbps
- Easily Expandable Mesh WiFi System
- 1 x RJ45 for 10/100/1000Mbps BaseT WAN
- 4 x RJ45 for 10/100/1000Mbps BaseT LAN
- DNV-GL Marine application
- 1x micro-SD slot for flexible use
- Firewall and VPN for security connection
- Backup WAN interfaces for connection reliability
- Industrial EMC protection, -40 to +75°C wide-range temperature operation
- Rugged metal case with wall or DIN-Rail mount
- PoE PD support for flexible deployment

PRODUCT DESCRIPTION

ATOP AWR is an advanced device that allows a very tangible scale-up of almost any industrial wireless infrastructure. In addition to high EMC protection, wide-temperature operation, superb hardware and advanced features, AWR will provide high-speed internet access with load balancing and high degrees of security, high speeds and advanced configuration options.



Quad-ARM Cortex A7 CPU

AWR integrates an industrial-grade Quad-core A7 ARM CPU, enabling the processing power you need to filter heavy traffic over firewalls, routing, forwarding and security measures.



High-Performance

With its integrated IEEE802.11ac wave-2 feature and supporting 2x2 concurrent MU-MIMO RF, AWR provides high-throughput connections through 2.4 GHz and 5.0 GHz bands.




Wi-Fi Mesh

AWR's advanced chipset allows you to set up several devices as a mesh network, achieving a self-healing network that adjusts its topology based on need-perfect for dynamic applications.



Security

Integrating firewall, zone forwarding, and VPN features, ATOP AWR allows you to connect your industrial network to the internet without fearing intrusions into your organization data.



Harsh Environments


ATOP AWR is proven to run at its maximum loading in the harshest EMC and climate environments.



Reliability

With a rugged metal housing and power redundancy, AWR is resistive to damage in harsh industrial environments.

APPLICATION

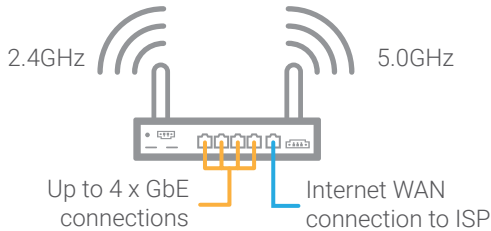


As a Wi-Fi DBDC Router


AWR5805's simplest operating mode is as a router/access point. Use it to connect to the internet through your broadband provider via PPPoE, Static IP or DHCP and provide internet connection to Wi-Fi and wired clients. With AWR you can define your own wireless access policy and set up a Firewall and VPN connection based on your needs.

As a Wi-Fi Mesh Primary Router

AWR5805 is designed to act as a mesh router or as a mesh node, and the configuration of one or both radios to work in mesh mode takes barely any time. No more fussing with topology changes or complicated wiring! With Wi-Fi mesh, all nodes can communicate with each other and the transmission paths are dynamically adjusted if a change in signal strength or topology is detected. So, even if a device is temporarily inaccessible due to interference or position, the network will still work perfectly. Mesh functionality can be combined with all other features of AWR5805.

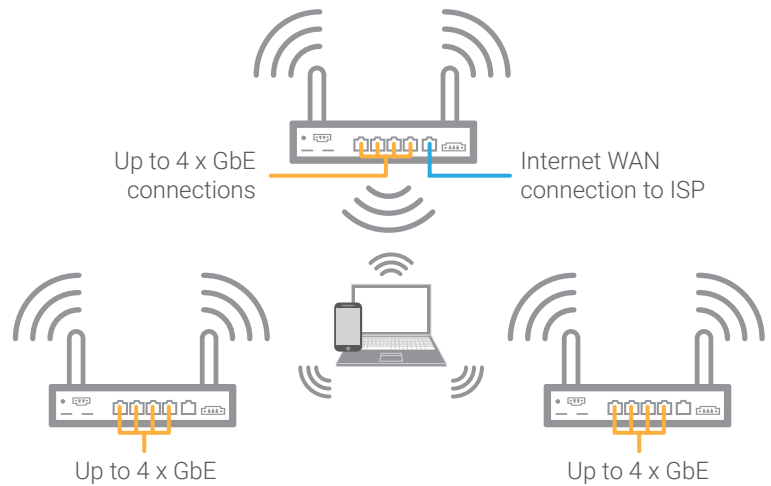

DIMENSIONS & LAYOUT

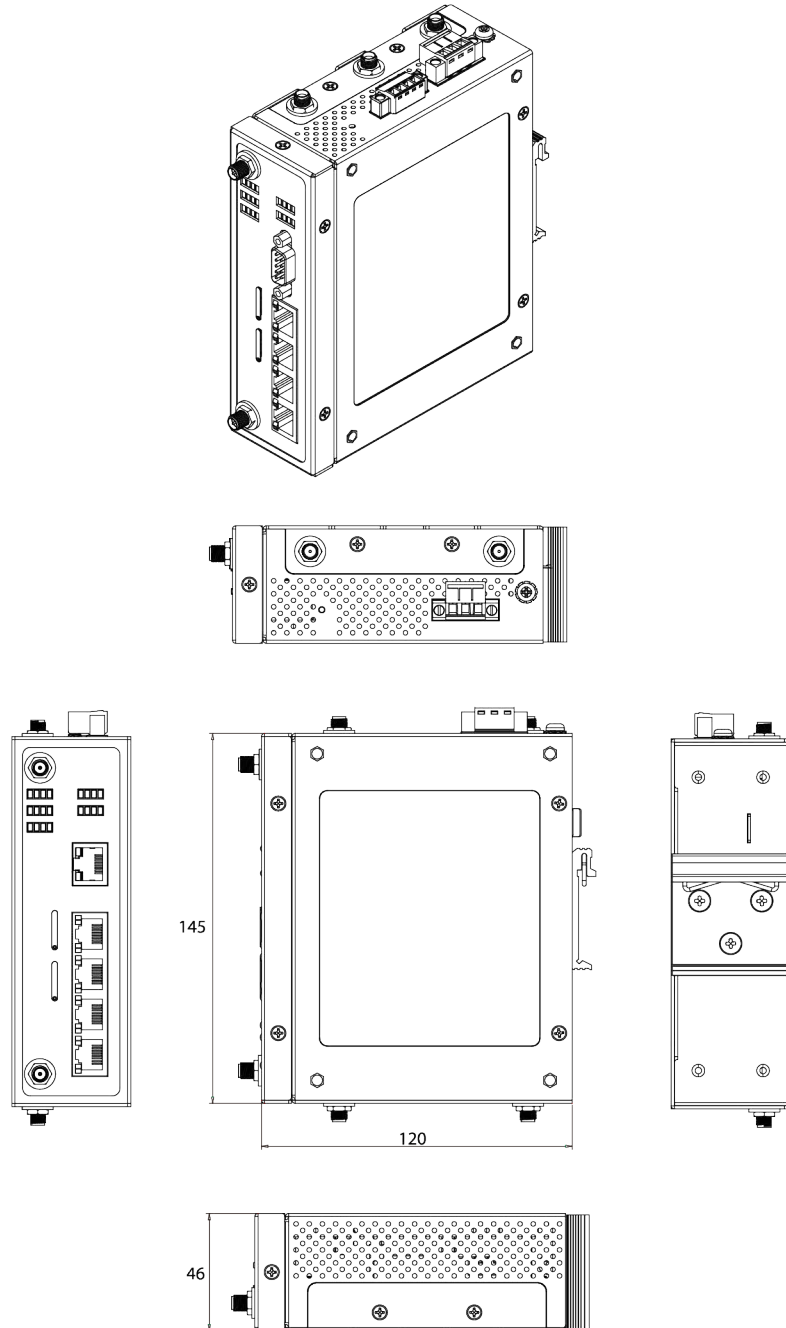

AWR5805 SERIES: 145 x 120 x 46 mm

SPECIFICATIONS

| Hardware Specifications | | |
|---------------------------------|--|--|
| Model Name | AWR5805 | |
| SOC | | |
| CPU | ARM Cortex A7, Quad-Core | |
| Network Interfaces/Connectivity | | |
| Wi-Fi | 802.11ac wave 2(5GHz), 802.11a/b/g/n(2.4GHz/5GHz) MU-MIMO 2x2 (2 streams) Wi-Fi Mesh ready | |
| Ethernet ports | Standard | IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) IEEE 802.3ab for 1000BaseT(X) |
| | Ports | 5x 10/100/1000 BASE-TX RJ-45 1 x WAN 4 x LAN |
| Antennas | | |
| Wi-Fi | 2x SMA(M) antennas | |
| Watchdog | | |
| Hardware WD Reset | Yes | |
| External IO Interfaces | | |
| Default/Reset Button | 1 key | |
| SD Slot | 1x micro-SD slot | |
| LED Indicators | | |
| LEDs | PWR, 2.4GHz Wi-Fi, 5.0 GHz Wi-Fi, LAN, WAN | |
| Power | | |
| Voltage Input | DC Power : 12 to 48V | |
| Consumption | < 18W | |
| Redundancy | No | |
| Connector | 3-pin Terminal block | |
| Reverse polarity protection | Yes | |
| PoE | PoE PD, 802.3at, Mode A | |
| Mechanicals | | |
| Casing material | Metal housing | |
| Dimension L x W x H (mm) | 145 x 120 x 46 | |
| Weight | 726 g | |
| Installation | DIN-Rail or Wall-Mount (optional kit) | |
| Ingress Protection Rating | IP30 protection | |
| Environment limits | | |
| Operating Temperature | -40°C to +75°C (-22°F to +158°F) | |
| Storage Temperature | -40°C to +85°C (-40°F to +185°F) | |
| Ambient Relative Humidity | 5% to 95% RH, (non-condensing) | |

| Software Specifications | |
|-------------------------|--|
| Network | |
| IPv4/IPv6 | DHCP server |
| | DHCP Client/Static IP/PPPoE |
| Connection | Telnet, SSH, TFTP/SFTP, Http, Https, SNMP |
| Other Protocols | NTP, DNS, 802.1Q VLAN, QoS, VRRP, MQTT |
| Security | |
| Firewall | Access control list (ACL) |
| | Port Forwarding |
| | Attack Prevention (Inserted after Port Forwarding) |
| VPN | IPSEC, OPEN-VPN, L2TP, PPTP |
| Reliability | |
| Dev Redundancy | VRRP |
| Schedule operation | Schedule control of application |
| WLAN | |
| WLAN Connection | AP (802.11 a/b/g/n/ac), Mesh |
| Wi-Fi Security | OWE/WPA-PSK/WPA2-PSK/WPA3-PSK (SAE) |
| Management | |
| System Configuration | WEB, Telnet, SSH |
| Firmware upgrade | WEB, TFTP |
| System Log | Log data to Local memory, remote logger, local flash |
| SNMP | SNMP v1/v2/v3 |
| Diagnostics | Ping, Traceroute, Nslookup |
| Remote Management | ATOP OKRA remote management system |
| Statistics | |
| Statistics | Memory, Mobile, WAN, Wireless, LAN |

REGULATORY APPROVALS

| Regulatory Approvals | | | | |
|----------------------|--|------------------------------|--------------------------------|-------|
| Safety | UL/IEC 62368-1, IEC60950-1, EN62368-1 | | | |
| EMC | EN55032, EN61000-6-4, EN55024, EN61000-6-2, FCC Part 15B, FCC Part 18 | | | |
| Wi-Fi | EN300328 for WIFI b/g/n 2.4G, EN301893 for WIFI a/n/ac 5G, EN62311 MPE Report, Part 15C for 2.4G b/g/n, Part 15E for 5G B1/B4 a/n/ac | | | |
| Test | Item | | Value | Level |
| IEC 61000-4-2 | ESD | Contact Discharge | ±6KV | 3 |
| | | Air Discharge | ±8KV | 3 |
| IEC 61000-4-3 | RS | Enclosure Port | 10 (V/m) , 80-1000MHz | 3 |
| | | | 3 (V/m), 1.4-2.0GHz | 3 |
| | | | 10 (V/m), 2.0 to 2.7GHz | 3 |
| IEC 61000-4-4 | EFT | DC Power Port Signal Port | ±2.0KV@ 5.0kHz | 3 |
| | | | ±1.0KV @ 5.0kHz | 3 |
| IEC 61000-4-5 | Surge | DC Power Port Signal Port | Line-to-Line ±1KV | 3 |
| | | | Line-to-Earth ±2KV | 3 |
| | | | Line-to-Earth ±2.0KV | 3 |
| IEC 61000-4-6 | CS | DC Power Port Signal Port | 10V, 150KHz to 80MHz, 80%AM | 3 |
| | | | 10V, 150KHz to 80MHz, 80%AM | 3 |
| IEC 61000-4-8 | PFMF | Enclosure | 30A/m (r.m.s), 50Hz or 60Hz | 4 |
| Shock | IEC 60068-2-27 | | | |
| Drop | IEC 60068-2-32 | | | |
| Vibration | IEC 60068-2-64 | | | |
| Others | RoHS, including 2015 amendment REACH Conflict Mineral Free | | | |
| Warranty | 5 years | | | |

ORDERING INFORMATION

Ordering information

| Model | Part Number | Ethernet (RJ45) | WI-FI | BT | LoRa | PoE | GPS |
|----------|-----------------|-----------------|-------------------|----|------|-----|-----|
| AWR5805 | 1P1AWR58050001G | 1x WAN, 4x LAN | 802.11/a/b/g/n/ac | - | - | - | - |
| AWR5805P | 1P1AWR5805P001G | 1x WAN, 4x LAN | 802.11/a/b/g/n/ac | - | - | Yes | - |

Optional Accessories

| Model | Part Number | Description |
|-------------|-----------------|---|
| AD1048-24FS | 50500481240001G | DIN-Rail Power Supply Input: 100-240VAC / 120-370VDC; Output: 2A@24VDC |
| UV336-1230 | 50500361120001G | Power adapter Input: 100-240VAC; Output: 3A@12VDC; US plug |