



*Atop Technologies, Inc.*

---

# *Protocol Gateway IEC61850 Client/Server*

Protocol and  
eNode Designer configuration

## *eNode Configuration Manual*

V1.3

September 29<sup>th</sup>, 2017

**This PDF Document contains internal hyperlinks for ease of navigation.**  
For example, click on any item listed in the [Table of Contents](#) to go to that page.

- [IEC 61850 Configuration Guide](#)
  - [IEC 61850 Interoperability](#)
- 

## **Published by:**

### **Atop Technologies, Inc.**

2F, No. 146, Sec. 1, Tung-Hsing Rd,  
30261 Chupei City, Hsinchu County  
Taiwan, R.O.C.

Tel: +886-3-550-8137  
Fax: +886-3-550-8131  
[www.atoponline.com](http://www.atoponline.com)  
[www.atop.com.tw](http://www.atop.com.tw)

## Important Announcement

The information contained in this document is the property of Atop technologies, Inc., and is supplied for the sole purpose of operation and maintenance of Atop Technologies, Inc., products.

No part of this publication is to be used for any other purposes, and it is not to be reproduced, copied, disclosed, transmitted, stored in a retrieval system, or translated into any human or computer language, in any form, by any means, in whole or in part, without the prior explicit written consent of Atop Technologies, Inc.,  
Offenders will be held liable for damages and prosecution.

All rights, including rights created by patent grant or registration of a utility model or design, are reserved.

## Disclaimer

We have checked the contents of this manual for agreement with the hardware and the software described. Since deviations cannot be precluded entirely, we cannot guarantee full agreement. However, the data in this manual is reviewed regularly and any necessary corrections will be included in subsequent editions.

Suggestions for improvement are welcome.

All other product's names referenced herein are registered trademarks of their respective companies.

## Documentation Control

<b>Author:</b>	Matteo Tabarelli
<b>Revision:</b>	1.3
<b>Revision History:</b>	Change format, and features improvement
<b>Creation Date:</b>	9 December 2015
<b>Last Revision Date:</b>	29 September 2017
<b>Product Reference:</b>	PG59XX User Manual
<b>Document Status:</b>	Release

## Table of Contents

1	Introduction.....	6
1.1	Scope .....	6
1.2	Overview.....	7
1.2.1	Document Reference.....	7
1.2.2	List of Abbreviations .....	7
2	General Description .....	8
2.1	General Screen Description .....	8
2.2	SCL Tree Explanation .....	9
2.3	Associated DAs are Combined into a Single Data Point.....	10
2.4	Replaces Ethernet Properties .....	11
3	IEC 61850 ADH Application Configuration Guide .....	12
3.1	Adding the Module in eNode Designer.....	12
3.2	Common Configuration Details .....	13
3.2.1	Changing and Reloading SCL Files.....	13
3.3	Client Configuration .....	14
3.3.1	IEC 61850 Client – Select which data points to use in eNode Designer.....	14
3.4	Server Configuration .....	15
3.4.1	IEC 61850 Server – Mapping Data Points to the Local IED .....	15
3.4.2	IEC 61850 Server - Altering Existing Mappings .....	17
3.4.3	IEC 61850 Server - GOOSE Subscription .....	18
4	Reference Guide .....	19
4.1	Mass Tree Expanding and Collapsing.....	19
4.2	Table Buttons .....	20
4.3	Modify Selected Points Window.....	20
5	Protocol Implementation Conf. Statement (PICS).....	22
5.1	IEC 61850 Protocol Implementation Conformance Statement.....	22
5.2	ACSI Basic Conformance.....	22
5.3	ACSI Models Conformance Statement .....	23
5.4	ACSI Service Conformance Statement .....	24

## Table of Figures

Figure 2-1 – View of a newly loaded server SCL file.....	8
Figure 2-2 - Main screen. ....	9
Figure 2-3 - Main screen of a single logical node.....	9
Figure 2-4 – Combined DAs, example one. ....	10
Figure 2-5 – Combined DAs, example two. ....	11
Figure 3-1 - Adding an IEC 61850 module to the project. ....	12
Figure 3-2 – SCL file selection.....	13
Figure 3-3 – Altered file warning. ....	13
Figure 3-4 - Mapped client example.....	14
Figure 3-5 - To map, first browse to the desired point. ....	15
Figure 3-6 - Mapping a server point.....	16

Figure 3-7 - Point has been mapped. ....	16
Figure 3-8 – Altering an existing mapping warning. ....	17
Figure 3-9 – GOOSE subscription: data point selection.....	18
Figure 4-1 - SCL tree node context menu.....	19
Figure 4-2 - SCL tree pane context menu.....	19
Figure 4-3 - Table buttons. ....	20
Figure 4-4 - Opening the Modify Selected Points window. ....	21
Figure 4-5 - Modify Selected Points window. ....	21

---

## List of Tables

---

Table 2-1 – Automatic IP Setting Modifications. ....	11
--	----

# 1 Introduction

Thank you for Buying Atop's Protocol Gateway.

The product is bundled with the following three user manuals:

- 1) Hardware specific installation user manual- **not covered in this document**. It covers Atop's hardware installation procedure, wiring, power connection etc.
- 2) Getting started with Atop's Protocol Gateway user manual – configuration tool introduction, web configuration, software architecture introduction– **not covered in this document**. This manual covers the introduction, installation, network set-up maintenance and using of the configuration tool software, including the procedure to be followed for uploading new configurations to Atop's device.
- 3) Protocol specific user manual (**This Manual**). **One protocol-specific manual will be provided for each protocol installed on the device**. This manual covers:
  - a. Basic device network configuration
  - b. Step-by-step protocol set-up for in eNode designer
  - c. Description of the protocol-specific software features, the device profile and the implementation table of supported functionalities.

This manual is for **IEC 61850 Client/Server** and describes how to use the **IEC 61850 eNode Designer Module** to configure Atop's *IEC 61850 ADH Application* within the eNode Designer configuration tool.

## 1.1 Scope

This document is divided into 3 major sections:

- **Overview with General Description**; and a
- **IEC 61850 ADH Application Configuration Guide**
- **IEC 61850 ADH Application Interoperability**

IEC 61850 Standard related information and the IEC 61850 Standard itself is not part of the scope of this document, so it is assumed the user to have some basic knowledge about the protocol. For more detailed information on the IEC 61850 Standard visit the official IEC website on <http://www.iec.ch>

This manual assumes that reader has some basic knowledge of the IEC 61850 standard documents and protocol. The following is the document list:

IEC 61850 Document Part	Description
IEC 61850-1	Introduction and overview
IEC 61850-2	Glossary
IEC 61850-3	General requirements
IEC 61850-4	System and project management
IEC 61850-5	Communication requirements for functions and device models
IEC 61850-6	Configuration description language for communication in electrical substations related to IED's

IEC 61850-7-1	Basic communication structure for substation and feeder equipment – Principles and models
IEC 61850-7-2	Basic communication structure for substation and feeder equipment – Abstract communication service interface (ACSI)
IEC 61850-7-3	Basic communication structure for substation and feeder equipment – Common data classes
IEC 61850-7-4	Basic communication structure for substation and feeder equipment – Compatible logical node classes and data classes
IEC 61850-8-1	Specific communication service mapping (SCSM) – Mappings to MMS (ISO/IEC 9506-1 and ISO/IEC 9506-2) and to ISO/IEC 8802-3
IEC 61850-9-1	Specific communication service mapping (SCSM) – Sampled values over serial unidirectional multi-drop point-to-point link
IEC 61850-9-2	Specific communication service mapping (SCSM) – Sampled values over ISO/IEC 8802-3 2
IEC 61850-10	Conformance testing
IEC 61850-80-1 Ed. 1.0	Communication networks and systems for power utility automation – Part 80-1: Guideline to exchange information from a CDC based data model using IEC 60870-5-101/104

---

## 1.2 Overview

---

### 1.2.1 Document Reference

- [1] Document Title: 197-0100 eNode Designer User Manual  
Revision: Version 1.00

### 1.2.2 List of Abbreviations

ADH	= Application Data Hub
DA	= Data Attribute
IEC	= International Electrotechnical Commission
IED	= Intelligent Electronic Device
SCL	= Substation Configuration Language

## 2 General Description

The IEC 61850 eNode Designer Module uses a pre-existing SCL file for configuration; the configuration tool's primary action is to select which data points should be added to or mapped from the ADH database.

When an SCL file is loaded into eNode Designer, a *copy* is automatically saved in the eNode Designer project file. This allows the project file to be sent (e.g. email) and opened anywhere without the need to send the SCL file as well.

The generation or the editing of the SCL file (ICD designer) is not covered inside this manual. For SCL file creation or editing, please contact an Atop Technologies representative

### 2.1 General Screen Description

Once an SCL file has been imported, a view similar to the following will be shown. The tab section allows the user to browse the local IED versus the connected remote IEDs.

In the **client**, there are no configuration options for the local IED so that tab will not be displayed. It just has a tab of remote IEDs showing all the servers connected.

In the **server**, the local IED is configurable so that tab is shown. In 61850 servers, the only data points should be accessed access from remote IEDs are those published on GOOSE, so the remote IEDs tabbed is named "GOOSE subscription".

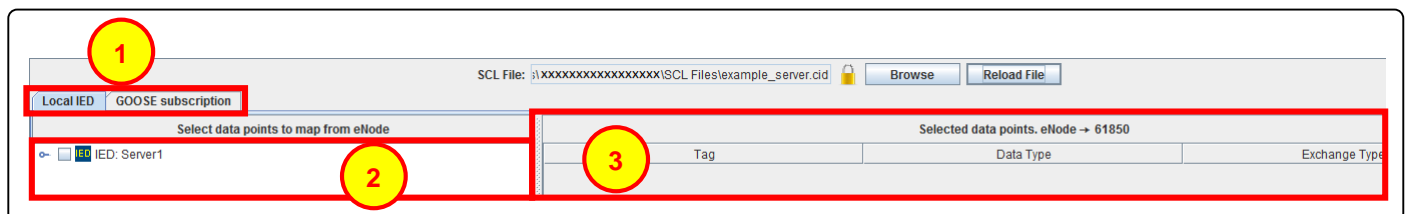


Figure 2-1 – View of a newly loaded server SCL file.

- 1 Tabs** – Local IEDs will be separate from Remote IEDs. See details above.
- 2 SCL Tree Windowpane** – This shows the Project Tree of the currently selected IED. The tick-boxes allow for selection of data points for mapping. Expand the branches to view further down the project tree.
- 3 Mapped Points** – This is where the points that have been mapped will appear. Each row in this table corresponds to a single "ticked" leaf DA node in the tree.



## 2.2 SCL Tree Explanation

The SCL file given is expanded into a tree-view showing different levels of IED, Logical Devices, Logical Nodes, then into Data Objects and Data Attributes. The “final” nodes are mappable data points. A screen shot is shown below.

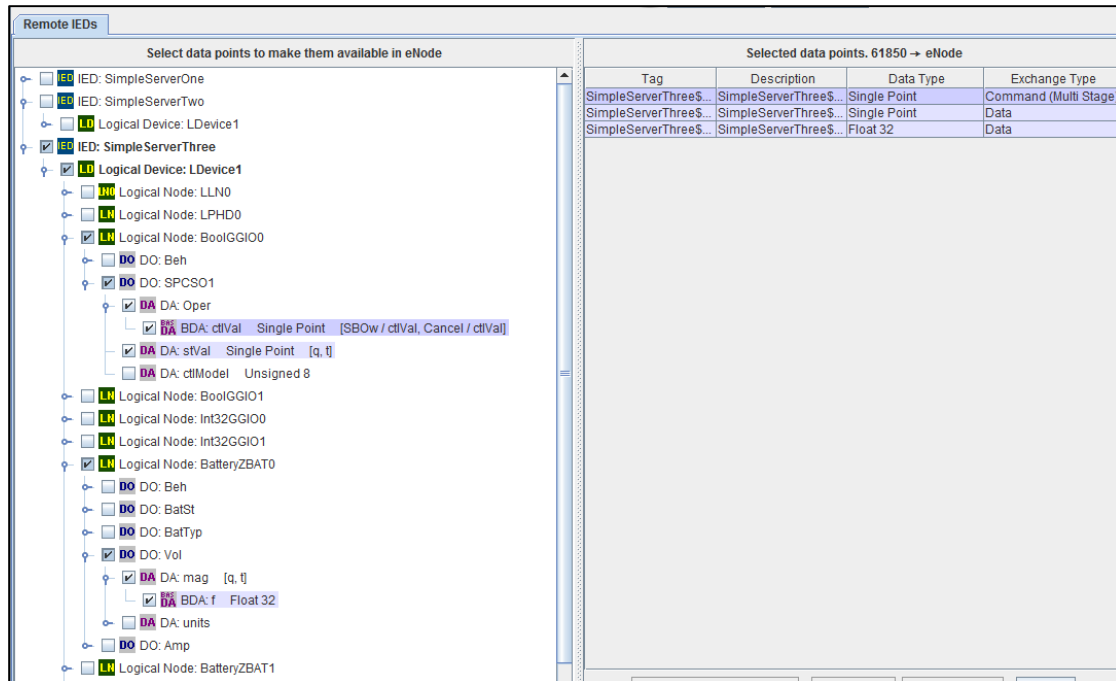


Figure 2-2 - Main screen.

Each mappable point has a description of its data type, which is extracted from the SCL file. A zoomed-in portion of the tree is shown below along with a more detailed description of the components.

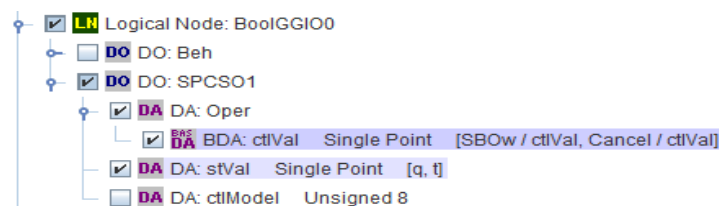


Figure 2-3 - Main screen of a single logical node.

For example with this BoolGGIO0/SPCSO1/stVal, the tree node text contains information about its node type (DA), node name (stVal), ADH Data Type (Single Point), and in this case also some square bracket notation. The square bracket notation shows that the *q* and *t* DAs are bound with the *stVal* data point. This is explained further in section 2.3.

The data type of the point is extracted from the IEC 61850 data type (e.g. “BOOLEAN” becomes “Single Point”). A special case is 61850 enumerated types, which are placed in the eNode Database as “Unsigned 8”. Data types that the ADH does not support, such as string types, are not shown in the SCL tree at all.

## 2.3 Associated DAs are Combined into a Single Data Point

Every eNode Designer data point has an associated timestamp (when the data value changed) and quality flags. This is similar to how IEC 61850 works with *q* (quality) and *t* (timestamp) DAs being updated together with DAs such as *stVal*. Thus eNode Designer groups the *q* and *t* with the appropriate values according to the 61850 specification to the single eNode (a.k.a. ADH) data point. This means that the with the *stVal* eNode data point, the associated quality and time are mapped with the 61850 data attributes *q* and *t*.

Multi-stage commands (such as Select Before Operates) are represented as a single data point for mapping in eNode Designer. Thus, the 61850 Operate structures are combined to a single structure: the “Oper”.

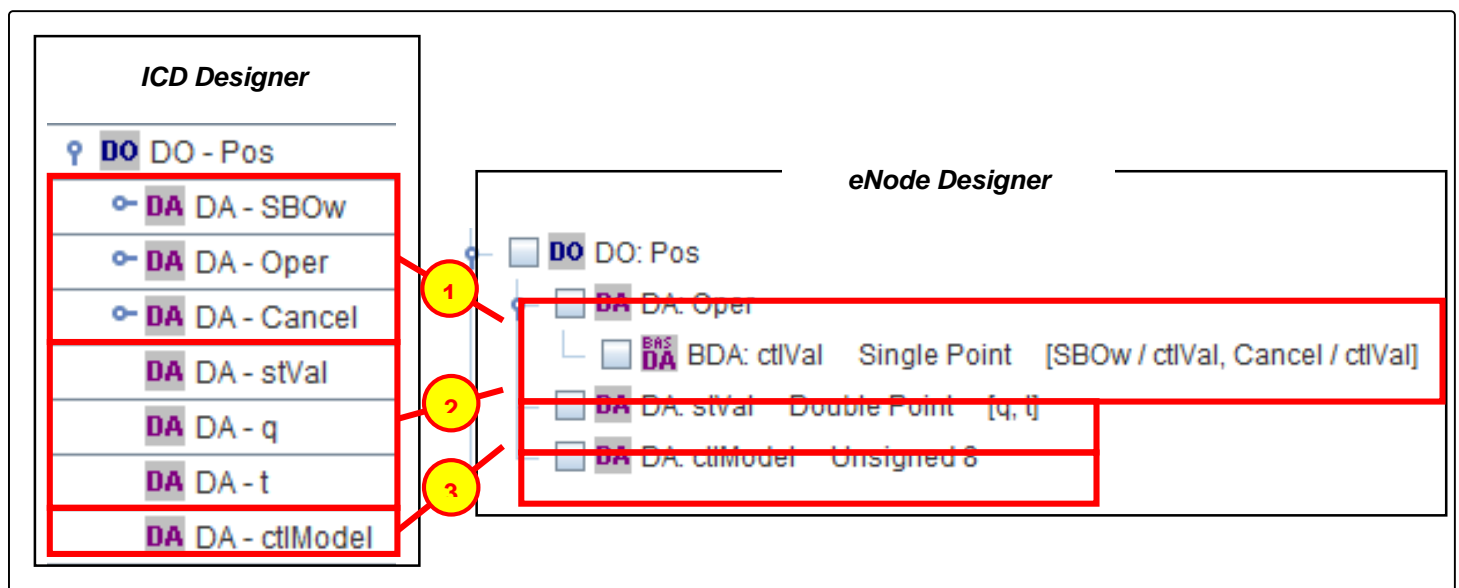


Figure 2-4 – Combined DAs, example one.

This figure contains a screenshot from *ICD Designer* and a screenshot from *eNode Designer* to illustrate how data points are grouped together within *eNode Designer*. **Both images show the same Pos Data Object** in a XCBR Logical Node.

- 1 **DA: Oper** – Shown in the *ICD designer* image as *DA - SBOw*, *DA - Oper* and *DA - Cancel*, these data attributes are all grouped as *DA: Oper* within *eNode Designer*. This point contains the *ctIVal* data points of *DA - SBOw*, *DA - Oper* and *DA - Cancel*. This is shown using the square brackets notation.
- 2 **DA: stVal** – According to IEC 61850 specification, *q* and *t* apply to *stVal*. They are separate DAs but they are grouped together in *eNode Designer*. This is shown using the square bracket notation after the “stVal”: [q, t].
- 3 **DA: ctlModel** – This is only a single Data Point in both *ICD designer* and *eNode Designer*.

Another example is shown below. In this example, the *q* and *t* apply to the *mag* according to the 61850 specification. Any selected point “inside” this mag will have the *q* and *t* values associated with the mag combined into one data point.

For example, in this case, the *mag* has its quality and time mapped with the 61850 *q* and *t* DAs adjacent to the *mag*.

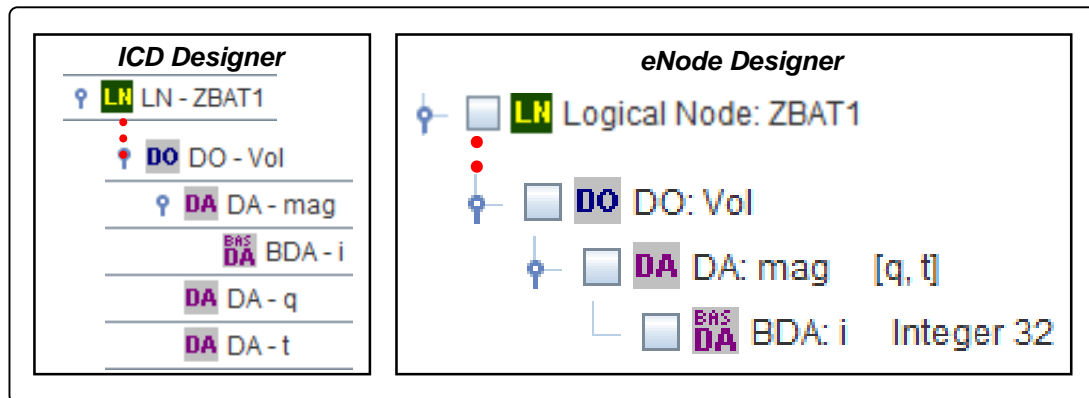


Figure 2-5 – Combined DAs, example two.

## 2.4 Replaces Ethernet Properties

When generating and sending the configuration to the target platform, the SCL's local IED Ethernet properties are modified to match those specified in eNode Designer.

That is, the following attributes are changed in the Access Point associated with the first IED in the SCL file that is sent to the target device.

Attribute	Modification
<P type="IP">...</P>	Replaced by Ethernet's property in eNode Designer
<P type="IP-SUBNET">...</P>	Replaced by Ethernet's property in eNode Designer
<P type="IP-GATEWAY">...</P>	Replaced by Ethernet's property in eNode Designer
<P type="MAC-Address">...</P>	Removed. Obtained automatically.

Table 2-1 – Automatic IP Setting Modifications.

## 3 IEC 61850 ADH Application Configuration Guide

### 3.1 Adding the Module in eNode Designer

The IEC 61850 module can only be added to *Ethernet* ports. An IEC 61850 ADH Application can be set up as a Client or a Server. The choice will be presented when adding it to the project. Atop device supports one server application per protocol per device.

To add the module to the project, follow the steps explained below.

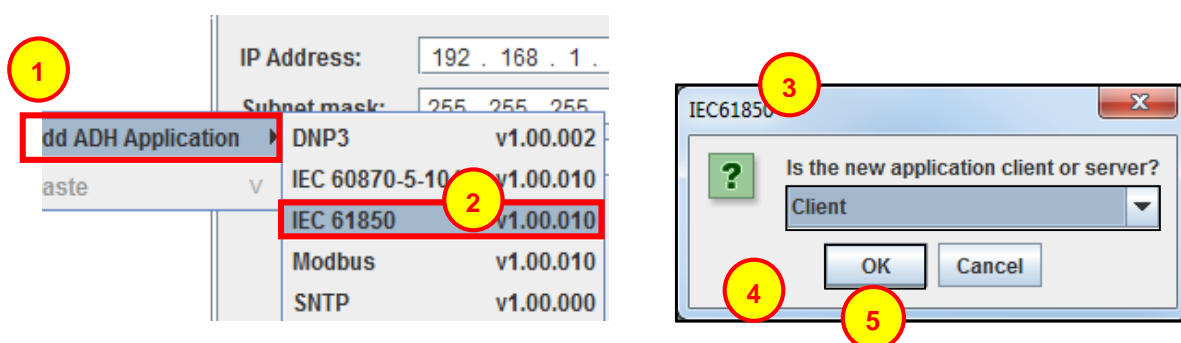


Figure 3-1 - Adding an IEC 61850 module to the project.

- 1 Click **Add ADH Application**.
- 2 Click **IEC61850**.
- 3 This dialogue box will appear asking whether the new application is to be configured as a *Client* or a *Server*.
- 4 Select either *Client* or *Server* from the drop down menu.
- 5 Click **OK** to add the application.

### 3.2 Common Configuration Details

After a new *IEC61850 Server* or *Client* is added, an *SCL file* needs to be selected. The following pane will appear at the top centre of the screen for both *IEC61850 Servers* and *Clients*.

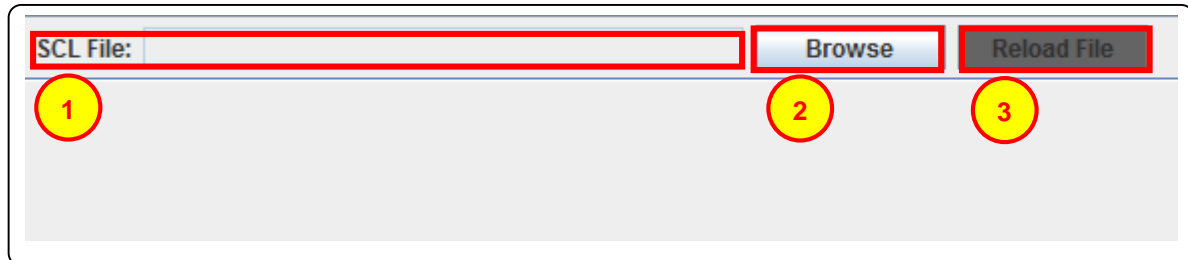


Figure 3-2 – SCL file selection.

- 1 **SCL file** – Shows location and name of the SCL file once it has been added to eNode Designer.
- 2 **Browse** – This button will bring up an *Open File* dialogue box to select the SCL file to be loaded for the ADH Application, see: **Open SCL File Dialogue Box**.
- 3 **Reload File** – This option is only available once a file has been loaded. Reload file is explained further in **Changing and Reloading SCL Files**.

#### 3.2.1 Changing and Reloading SCL Files

When an *SCL file* is loaded into *eNode Designer*, it is saved into the *eNode Designer* project file. If the *SCL file* has been changed, a warning will appear next to *Reload File*. Left clicking the *reload file* button will load the changes into *eNode Designer*.

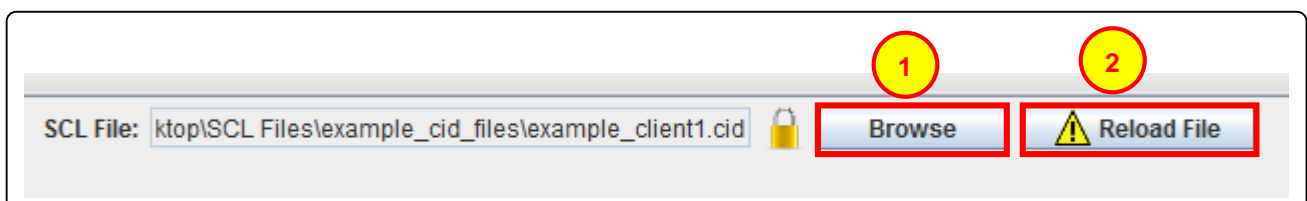


Figure 3-3 – Altered file warning.

- 1 **Browse** – This button can be used to change the current SCL file, however this will require confirming login details. This will bring up the *Open File* dialogue box to select the SCL file to be loaded for the ADH Application, see: **Open SCL File Dialogue Box**.
- 2 **Altered File Warning** – The exclamation mark within the yellow triangle will be shown when the currently loaded SCL file has been changed externally. This indicates that it will need to be reloaded to reflect those changes within eNode Designer.

### 3.3 Client Configuration

#### 3.3.1 IEC 61850 Client – Select which data points to use in eNode Designer.

Once a Client SCL file has been imported, the following view will be shown. In this example, some of the *SCL Tree* has been expanded and some data points selected.

Selecting data attributes in the tree assigns eNode Data points to them. Each eNode data point is shown in the table on the right. All the data points in the table are those available in eNode Designer for mapping. All data point values have default values automatically assigned based on the SCL file. The *Tag* and *Description* are, however, changeable by the user.

Checking (or unchecking) a tree node will check (or uncheck) all tree nodes “inside” it.

The screenshot shows the IEC 61850 Client configuration interface. The top bar displays the SCL File path: C:\Test\TestClient.cid. Below the bar, the interface is split into two main sections. The left section, labeled 'Remote IEDs' (1), contains a tree view titled 'Select data points to make them available in eNode'. The right section, labeled 'Selected data points. 61850 -> eNode' (3), contains a table of selected data points. A red box highlights the 'Project Tree Windowpane' (2) area, which includes the tree view and the table.

Tag	Description	Data Type	Exchange Type
SimpleServerOne\$LDDevice1\$BoolGGIO0\$SPCSO1\$stVal	SimpleServer...	Single Point	Data
SimpleServerOne\$LDDevice1\$BoolGGIO0\$Alm1\$stVal	SimpleServer...	Single Point	Data
SimpleServerOne\$LDDevice1\$BoolGGIO1\$SPCSO1\$stVal	SimpleServer...	Single Point	Data
SimpleServerOne\$LDDevice1\$Int32GGIO0\$SCSO1\$stVal	SimpleServer...	Integer 32	Data
SimpleServerOne\$LDDevice1\$SwitchXCBRO\$Pos\$Oper\$stVal	SimpleServer...	Single Point	Command (Multi...
SimpleServerOne\$LDDevice1\$SwitchXCBRO\$Pos\$stVal	SimpleServer...	Double Point	Data
SimpleServerOne\$LDDevice1\$SwitchXCBRO\$Pos\$ctlModel	SimpleServer...	Unsigned 8	Data

Figure 3-4 - Mapped client example.

- 1 **Remote IEDs** – This shows the Remote IED’s connected to the client, all Remote IED’s will show in this area under their respective IED tree nodes within the *Project Tree Windowpane*.
- 2 **Project Tree Windowpane** – This shows a tree view of all remote IEDs. The tick-boxes allow for selection of data points to be made available for mapping in the database. Expand the branches to view further down the project tree.



**Selected Data Points** – This is where the points selected for inclusion in the database will appear. Points that show in this area have been made available to the database and can be utilised by other applications.

### 3.4 Server Configuration

If the server SCL file has more than one IED in the file, the first one is the Local IED, and the rest are remote IEDs. The GOOSE subscription tab shows all remote IEDs. The way 61850 works, the only data points accessible in a server from remote IEDs are those that are published on GOOSE.

The IEC 61850 server application in some way acts like a server *and* a client. It is able to reference “client” points to and from the local IED, but also “produces” client points it puts in to the eNode Database from the remote IEDs.

#### 3.4.1 IEC 61850 Server – Mapping Data Points to the Local IED

To select a DA to map, expand the tree down to the final level (the final DA) and tick the checkbox.

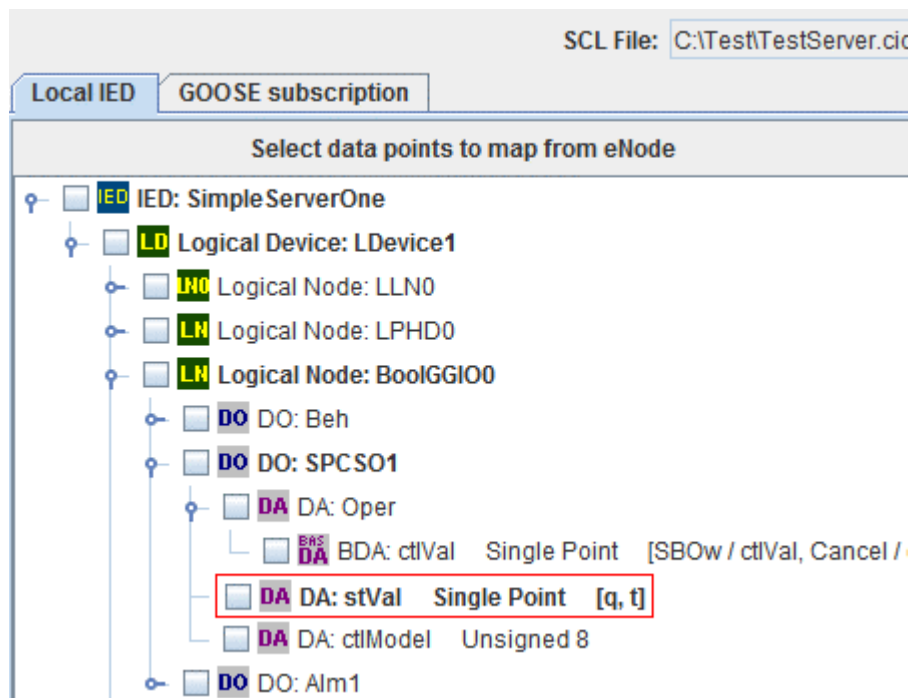


Figure 3-5 - To map, first browse to the desired point.

Selecting a point for mapping from eNode will bring up the following window. This window allows you to select which data point value to map to. Points are **live mapped** within the dialogue: as soon as a mapping is changed in this window, it is changed within *eNode Designer*.

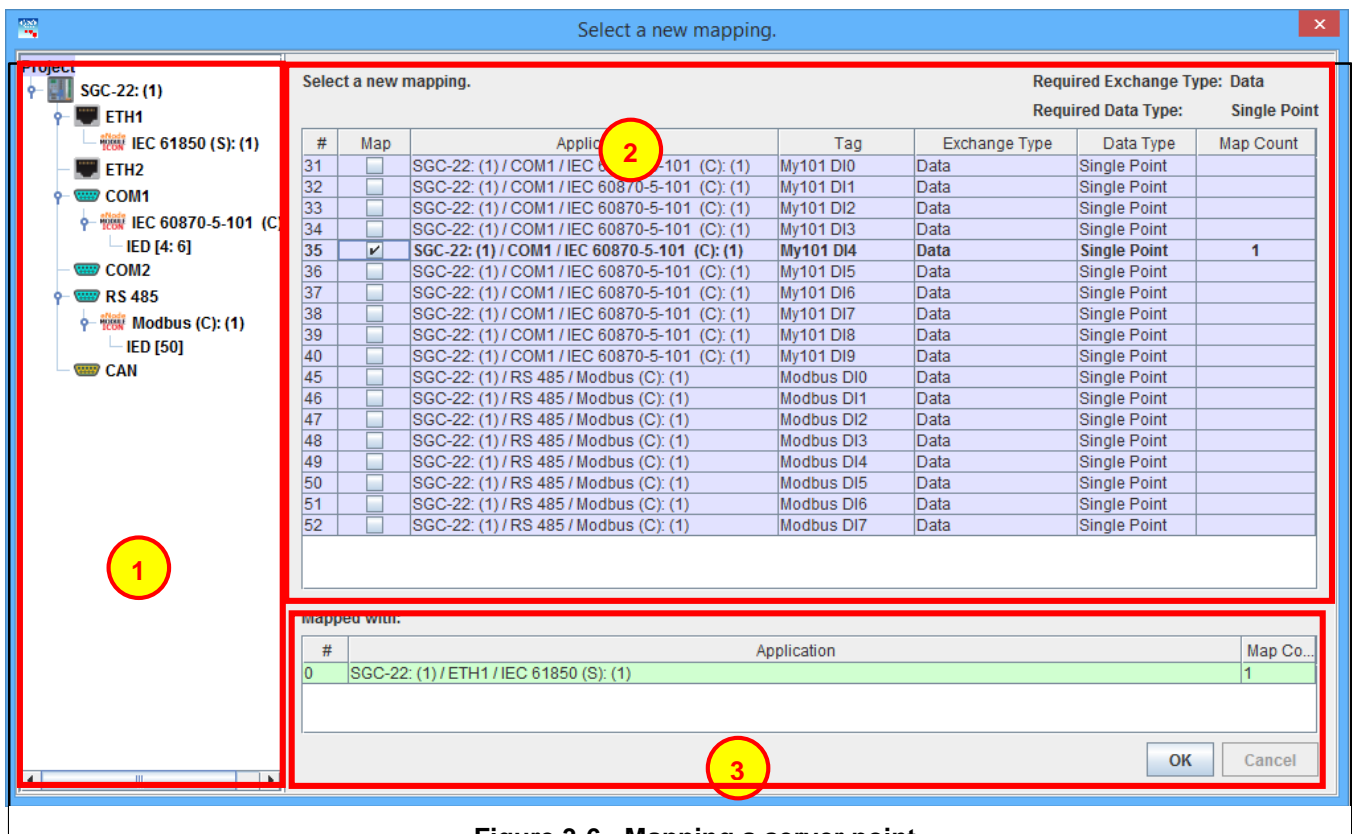


Figure 3-6 - Mapping a server point.

- 1 **Project Tree Windowpane** – This shows the eNode Designer project view. Use this to filter the list of available data points.
- 2 **Available Points** – This shows the list of possible points which can map to the given point.
- 3 **Mapped Points** – Shows the applications the selected point in (2) is currently mapped to.

Once points have been mapped they are added to the table.

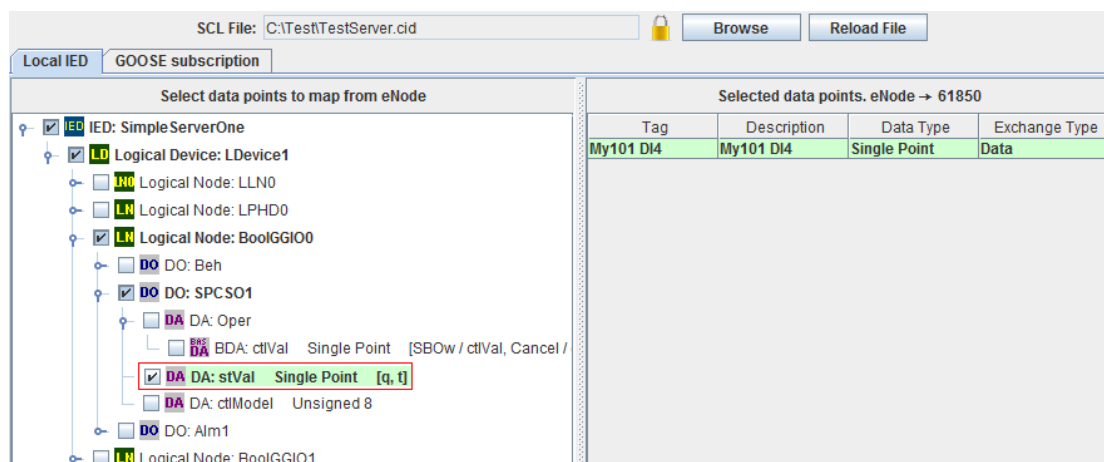


Figure 3-7 - Point has been mapped.



### 3.4.2 IEC 61850 Server - Altering Existing Mappings

The eNode Module only allows a data point to be mapped to *one* server DA. So if a client point is already mapped to another DA in this server, the cell background is shown in red, and attempting to map to this point will remove the other mapping.

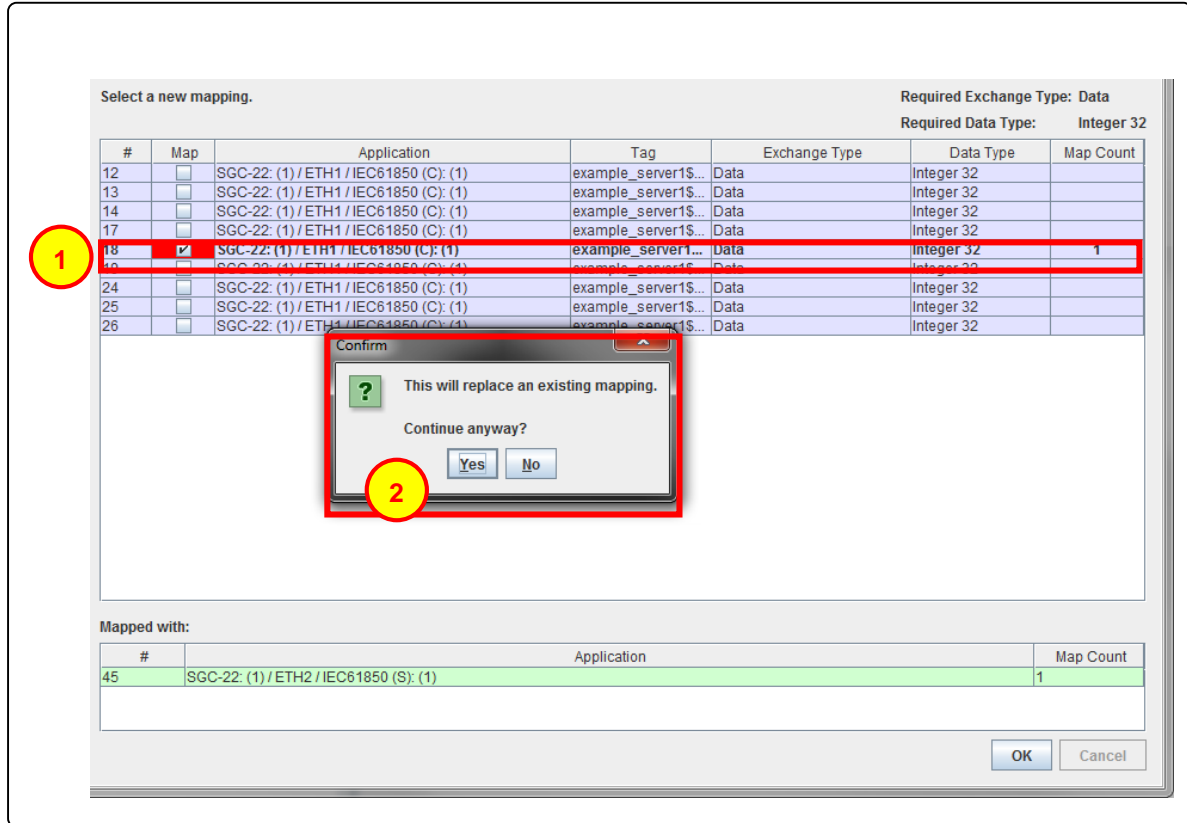


Figure 3-8 – Altering an existing mapping warning.

- 1 Mapped Point** – The red background shows that this point is already mapped to another DA in this 61850 server.
- 2 Replace Existing Mapping** – This confirmation will be asked when re-mapping such a point. Left clicking **Yes** will replace the existing mapping.

### 3.4.3 IEC 61850 Server - GOOSE Subscription

This tab works the same as the Client except the **only points displayed are those available on GOOSE**. That is, only points in a data set which are in a GOOSE control group are shown. In addition, all GOOSE information comes through as "Data". This means that commands cannot be handled server to server.

Clicking the GOOSE subscription tab in the Server view will show the following view. The project tree has been expanded and the entire IED selected for this example.

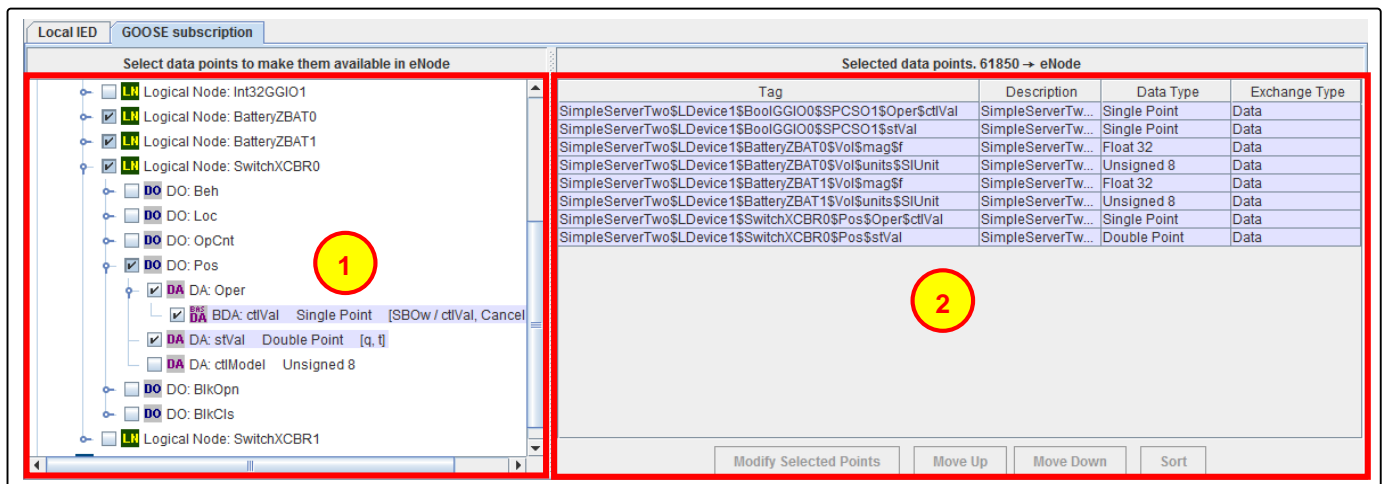


Figure 3-9 – GOOSE subscription: data point selection.

- 1 **Project Tree Windowpane** – This shows the project tree of the GOOSE subscription IED in order to select data points. The entire IED's data points are selected in this figure.
- 2 **Points Available For Mapping** – This shows the selected data points for mapping to eNode. The points shown in this location are currently available to other applications within eNode. Tags can be edited by double clicking them, or copied and pasted by right clicking.

## 4 Reference Guide

### 4.1 Mass Tree Expanding and Collapsing

There are several options for expanding and collapsing many tree nodes at once.

#### Right click a tree node:

<i>Expand All</i>	Expands all tree nodes inside the tree node.
<i>Collapse All</i>	Collapses the tree nodes inside it and the tree node itself.
<i>Collapse Below</i>	Collapses the tree nodes inside it

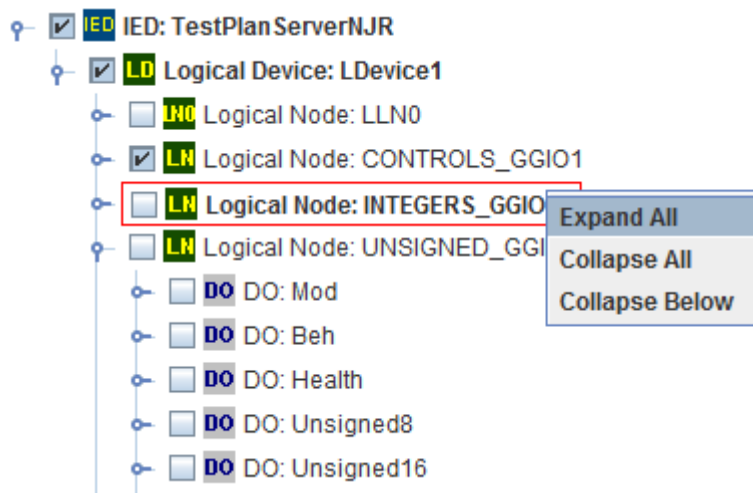


Figure 4-1 - SCL tree node context menu

#### Right click empty space in the SCL tree pane:

<i>Expand Entire Tree</i>	Expands the entire SCL tree. For very large files, it enforces a limit as a maximum number of nodes it will expand.
<i>Collapse Entire Tree</i>	Collapse the entire SCL tree.

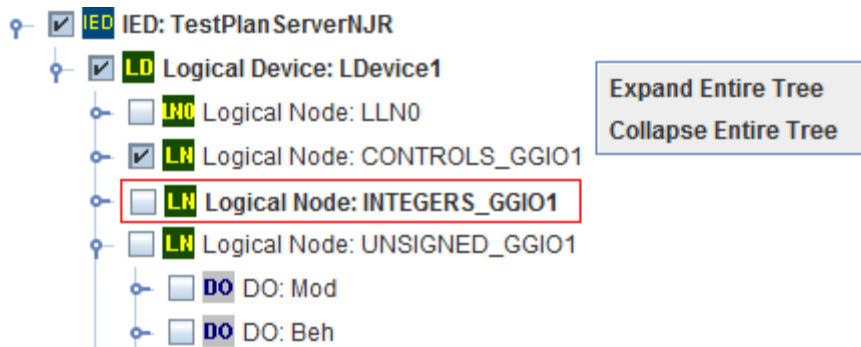


Figure 4-2 - SCL tree pane context menu

## 4.2 Table Buttons

At the bottom of the data point table, there are several buttons to modify and organise the table.

Selected data points. 61850 → eNode			
Tag	Description	Data Type	Exchange Type
SimpleServerOne\$LDevice1\$BoolGGIO0\$SPCSO1\$Oper\$ctlVal	SimpleServerOne...	Single Point	Command (Multi S...
SimpleServerOne\$LDevice1\$BoolGGIO0\$SPCSO1\$stVal	SimpleServerOne...	Single Point	Data
SimpleServerOne\$LDevice1\$BoolGGIO0\$SPCSO1\$ctlModel	SimpleServerOne...	Unsigned 8	Data
SimpleServerOne\$LDevice1\$BoolGGIO0\$Alm1\$stVal	SimpleServerOne...	Single Point	Data
SimpleServerOne\$LDevice1\$BatteryZBAT0\$Vol\$mag\$f	SimpleServerOne...	Float 32	Data
SimpleServerOne\$LDevice1\$BatteryZBAT0\$Vol\$units\$SIUnit	SimpleServerOne...	Unsigned 8	Data
SimpleServerOne\$LDevice1\$BatteryZBAT0\$Amp\$mag\$f	SimpleServerOne...	Float 32	Data
SimpleServerOne\$LDevice1\$BatteryZBAT1\$Vol\$mag\$f	SimpleServerOne...	Float 32	Data
SimpleServerOne\$LDevice1\$BatteryZBAT2\$Vol\$mag\$i	SimpleServerOne...	Integer 32	Data
SimpleServerThree\$LDevice1\$BoolGGIO0\$SPCSO1\$Oper\$ctlVal	SimpleServerThr...	Single Point	Command (Multi S...
SimpleServerThree\$LDevice1\$BoolGGIO0\$SPCSO1\$stVal	SimpleServerThr...	Single Point	Data
SimpleServerThree\$LDevice1\$BatteryZBAT0\$Vol\$mag\$f	SimpleServerThr...	Float 32	Data
<div> <div>Modify Selected Points</div> <div>Move Up</div> <div>Move Down</div> <div>Sort</div> </div>			

**Figure 4-3 - Table buttons.**

- Modify Selected Points** Brings up a window to allow changing the Tag and Description of all the selected points at once. See section 4.3 for details.
- Move Up** Moves the selected rows one row upward.
- Move Down** Moves the selected rows one row downward.
- Sort** Sorts the table to be in the same order as it appears in the SCL tree.

## 4.3 Modify Selected Points Window

The tags and descriptions of multiple points can be changed at once using this window. The data type and exchange type are fixed, since they are taken from the SCL file.

Select the desired points, then left click "Modify Selected Points". Note that the selection does not have to contain contiguous rows – for example you can select row 1,3 and 10 (select row 1, hold the CTRL key on the keyboard, then click row 3 and row 10).

Selected data points. 61850 → eNode			
Tag	Description	Data Type	Exchange Type
SimpleServerOne\$LDDevice1\$BoolGGIO0\$SPCSO1\$Oper\$ctlVal	SimpleServerOne...	Single Point	Command (Multi S...
SimpleServerOne\$LDDevice1\$BoolGGIO0\$SPCSO1\$stVal	SimpleServerOne...	Single Point	Data
SimpleServerOne\$LDDevice1\$BoolGGIO0\$SPCSO1\$ctlModel	SimpleServerOne...	Unsigned 8	Data
SimpleServerOne\$LDDevice1\$BoolGGIO0\$Alm1\$stVal	SimpleServerOne...	Single Point	Data
SimpleServerOne\$LDDevice1\$BatteryZBAT0\$Vol\$mag\$f	Simple ServerOn...	Float 32	Data
SimpleServerOne\$LDDevice1\$BatteryZBAT0\$Vol\$units\$SIUnit	SimpleServerOne...	Unsigned 8	Data
SimpleServerOne\$LDDevice1\$BatteryZBAT0\$Amp\$mag\$f	SimpleServerOne...	Float 32	Data
SimpleServerOne\$LDDevice1\$BatteryZBAT1\$Vol\$mag\$f	Simple ServerOn...	Float 32	Data
SimpleServerOne\$LDDevice1\$BatteryZBAT2\$Vol\$mag\$i	Simple ServerOn...	Integer 32	Data
SimpleServerThree\$LDDevice1\$BoolGGIO0\$SPCSO1\$Oper\$ctlVal	SimpleServerThr...	Single Point	Command (Multi S...
SimpleServerThree\$LDDevice1\$BoolGGIO0\$SPCSO1\$stVal	SimpleServerThr...	Single Point	Data
SimpleServerThree\$LDDevice1\$BatteryZBAT0\$Vol\$mag\$f	SimpleServerThr...	Float 32	Data
<div> <div>2</div> <div>Modify Selected Points</div> <div>Move Up</div> <div>Move Down</div> <div>Sort</div> </div>			

Figure 4-4 - Opening the Modify Selected Points window.

- 1 Select Desired Points
- 2 Left click the **Modify Selected Points** Button

This will bring up the following window.

Original:

Tag	Description	Data Type	Exchange Type
SimpleServerOne\$LDDevice1\$BatteryZBAT0\$Vol\$mag\$f	SimpleServerOne\$LDDevice1\$Batt...	Float 32	Data
SimpleServerOne\$LDDevice1\$BatteryZBAT1\$Vol\$mag\$f	SimpleServerOne\$LDDevice1\$Batt...	Float 32	Data
SimpleServerOne\$LDDevice1\$BatteryZBAT2\$Vol\$mag\$i	SimpleServerOne\$LDDevice1\$Batt...	Integer 32	Data

Preview:

Tag	Description	Data Type	Exchange Type
Battery Voltage 00	SimpleServerOne\$LDDevice1\$Batt...	Float 32	Data
Battery Voltage 01	SimpleServerOne\$LDDevice1\$Batt...	Float 32	Data
Battery Voltage 02	SimpleServerOne\$LDDevice1\$Batt...	Integer 32	Data

New values:

Tag	Description	Data Type	Exchange Type
Battery Voltage [2X]	[N]	[N]	Data

You can use "[N]" as the original text of the cell.

You can use "[X]" as an auto increment counter. [Y] and [Z] work similarly. Use [3X] to produce values like "001".

Define counter [X]

Define counter [Y]

Define counter [Z]

Start At: 0 Step by: 1

Start At: 0 Step by: 0

Start At: 0 Step by: 1

OK Cancel

Figure 4-5 - Modify Selected Points window.

In this window, modify the contents in the (1) "New values" area to see the (2) "Preview" area update accordingly. You can use the counters [X], [Y] and [Z] to substitute auto-incrementing integer values. You can specify the initial values and step values using the "Start At" and "Step by" fields at the bottom of the window.

## 5 Protocol Implementation Conf. Statement (PICS)

### 5.1 IEC 61850 Protocol Implementation Conformance Statement

Protocol Implementation Conformance Statements (PICS) contain information regarding the Abstract Communication Service Interface (ACSI) {IEC61850-7-2 edition 2.0 2010-08} components that may be tested. This tick list is a summary of the ACSI that has not been implemented and has been implemented by Atop Technologies Inc.

The following ACSI conformance statements are used to provide an overview and details about the Atop implementation for IEC 61850 software:

- ACSI basic conformance statement
- ACSI models conformance statement
- ACSI service conformance statement

### 5.2 ACSI Basic Conformance

The basic conformance statement shall be as defined in Table 1.

Table 1 - Basic conformance statement

		Client/ subscriber	Server/ publisher	Value/ comments
<b>Client-server roles</b>				
B11	<b>Server</b> side (of TWO-PARTY-APPLICATION-ASSOCIATION)	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
B12	<b>Client</b> side of (TWO-PARTY-APPLICATION-ASSOCIATION)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
<b>SCSMs supported</b>				
B21	<b>SCSM:</b> IEC 61850-8-1 used	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
B22	<b>SCSM:</b> IEC 61850-9-1 used	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
B23	<b>SCSM:</b> IEC 61850-9-2 used	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
B24	<b>SCSM:</b> other			
<b>Generic substation event model (GSE)</b>				
B31	<b>Publisher</b> side	<input type="checkbox"/>	<input type="checkbox"/>	
B32	<b>Subscriber</b> side	<input type="checkbox"/>	<input type="checkbox"/>	
<b>Transmission of sampled value model (SVC)</b>				
B41	<b>Publisher</b> side	<input type="checkbox"/>	<input type="checkbox"/>	
B42	<b>Subscriber</b> side	<input type="checkbox"/>	<input type="checkbox"/>	

### 5.3 ACSI Models Conformance Statement

The ACSI models conformance statement shall be as defined in Table 2.

Table 2 - ACSI models conformance statement

		Client/ subscriber	Server/ publisher	Value/ comments
<b>If Server side (B11) supported</b>				
M1	Logical device	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
M2	Logical node	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
M3	Data	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
M4	Data set	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
M5	Substitution	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
M6	Setting group control	<input type="checkbox"/>	<input type="checkbox"/>	
	Reporting			
M7	Buffered report control	<input type="checkbox"/>	<input type="checkbox"/>	
M7-1	sequence-number	<input type="checkbox"/>	<input type="checkbox"/>	
M7-2	report-time-stamp	<input type="checkbox"/>	<input type="checkbox"/>	
M7-3	reason-for-inclusion	<input type="checkbox"/>	<input type="checkbox"/>	
M7-4	data-set-name	<input type="checkbox"/>	<input type="checkbox"/>	
M7-5	data-reference	<input type="checkbox"/>	<input type="checkbox"/>	
M7-6	buffer-overflow	<input type="checkbox"/>	<input type="checkbox"/>	
M7-7	entryID	<input type="checkbox"/>	<input type="checkbox"/>	
M7-8	BufTm	<input type="checkbox"/>	<input type="checkbox"/>	
M7-9	IntgPd	<input type="checkbox"/>	<input type="checkbox"/>	
M7-10	GI	<input type="checkbox"/>	<input type="checkbox"/>	
M8	Unbuffered report control	<input type="checkbox"/>	<input type="checkbox"/>	
M8-1	sequence-number	<input type="checkbox"/>	<input type="checkbox"/>	
M8-2	report-time-stamp	<input type="checkbox"/>	<input type="checkbox"/>	
M8-3	reason-for-inclusion	<input type="checkbox"/>	<input type="checkbox"/>	
M8-4	data-set-name	<input type="checkbox"/>	<input type="checkbox"/>	
M8-5	data-reference	<input type="checkbox"/>	<input type="checkbox"/>	
M8-6	BufTm	<input type="checkbox"/>	<input type="checkbox"/>	
M8-7	IntgPd	<input type="checkbox"/>	<input type="checkbox"/>	
M8-8	GI	<input type="checkbox"/>	<input type="checkbox"/>	
	Logging			
M9	Log control	<input type="checkbox"/>	<input type="checkbox"/>	
M9-1	IntgPd	<input type="checkbox"/>	<input type="checkbox"/>	
M10	Log	<input type="checkbox"/>	<input type="checkbox"/>	
M11	Control	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
<b>If GSE (B31/B32) is supported</b>				

M12	GOOSE	<input type="checkbox"/>	<input type="checkbox"/>	
M13	GSSE	<input type="checkbox"/>	<input type="checkbox"/>	
If <b>SVC</b> (B41/B42) is supported				
M14	Multicast SVC	<input type="checkbox"/>	<input type="checkbox"/>	
M15	Unicast SVC	<input type="checkbox"/>	<input type="checkbox"/>	
For all IEDs				
M16	Time	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
M17	File Transfer	<input type="checkbox"/>	<input type="checkbox"/>	

## 5.4 ACSI Service Conformance Statement

The ACSI service conformance statement shall be as defined in Table 3 (depending on the statements in Table 1).

Table 3 - ACSI service conformance statement

	Services	AA:TP/MC	Client/ subscriber	Server/ publisher	Comments
<b>Server (Clause 7)</b>					
S1	ServerDirectory	TP	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
<b>Application association (Clause 8)</b>					
S2	Associate		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
S3	Abort		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
S4	Release		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
<b>Logical device (Clause 9)</b>					
S5	LogicalDeviceDirectory	TP	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
<b>Logical node (Clause 10)</b>					
S6	LogicalNodeDirectory	TP	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
S7	GetDataValues	TP	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
<b>Data (Clause 11)</b>					
S8	GetDataValues	TP	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
S9	SetDataValues	TP	<input type="checkbox"/>	<input type="checkbox"/>	
S10	GetDataDirectory	TP	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
S11	GetDataDefinition	TP	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
<b>Data set (Clause 12)</b>					



S12	GetDataSetValues	TP	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
S13	SetDataSetValues	TP	<input type="checkbox"/>	<input type="checkbox"/>	
S14	CreateDataSet	TP	<input type="checkbox"/>	<input type="checkbox"/>	
S15	DeleteDataSet	TP	<input type="checkbox"/>	<input type="checkbox"/>	
S16	GetDataSetDirectory	TP	<input type="checkbox"/>	<input type="checkbox"/>	
<b>Setting group control (Clause 16)</b>					
S18	SelectActiveSG	TP	<input type="checkbox"/>	<input type="checkbox"/>	
S19	SelectEditSG	TP	<input type="checkbox"/>	<input type="checkbox"/>	
S20	SetSGValues	TP	<input type="checkbox"/>	<input type="checkbox"/>	
S21	ConfirmEditSGValues	TP	<input type="checkbox"/>	<input type="checkbox"/>	
S22	GetSGValues	TP	<input type="checkbox"/>	<input type="checkbox"/>	
S23	GetSGCBValues	TP	<input type="checkbox"/>	<input type="checkbox"/>	
<b>Reporting (Clause 17)</b>					
Buffered report control block (BRCB)					
S24	Report	TP	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
S24-1	data-change (dchg)		<input type="checkbox"/>	<input type="checkbox"/>	
S24-2	qchg-change (qchg)		<input type="checkbox"/>	<input type="checkbox"/>	
S24-3	data-update (dupd)		<input type="checkbox"/>	<input type="checkbox"/>	
S25	GetBRCBValues	TP	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
S26	SetBRCBValues	TP	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
Unbuffered report control block (URCB)					
S27	Report	TP	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
S27-1	data-change (dchg)		<input type="checkbox"/>	<input type="checkbox"/>	
S27-2	qchg-change (qchg)		<input type="checkbox"/>	<input type="checkbox"/>	
S27-3	data-update (dupd)		<input type="checkbox"/>	<input type="checkbox"/>	
S28	GetURCBValues	TP	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
S29	SetURCBValues	TP	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
<b>Logging (Clause 17)</b>					
Log control block					
S30	GetLCBValues	TP	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
S31	SetLCBValues	TP	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
Log					
S32	QueryLogByTime	TP	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
S33	QueryLogAfter	TP	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
S34	GetLogStatusValues	TP	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
<b>Generic substation event model (GSE)</b>					
<b>GOOSE (Clause 18)</b>					
S35	SendGOOSEMessage	MC	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	

S36	GetGoReference	TP	<input type="checkbox"/>	<input type="checkbox"/>	
S37	GetGOOSEElementNumber	TP	<input type="checkbox"/>	<input type="checkbox"/>	
S38	GetGoCBValues	TP	<input type="checkbox"/>	<input type="checkbox"/>	
S39	SetGoCBValues	TP	<input type="checkbox"/>	<input type="checkbox"/>	
<b>GSSE</b>					
S40	SendGSSEMessage	MC	<input type="checkbox"/>	<input type="checkbox"/>	
S41	GetGsReference	TP	<input type="checkbox"/>	<input type="checkbox"/>	
S42	GetGSSEElementNumber	TP	<input type="checkbox"/>	<input type="checkbox"/>	
S43	GetGsCBValues	TP	<input type="checkbox"/>	<input type="checkbox"/>	
S44	SetGsCBValues	TP	<input type="checkbox"/>	<input type="checkbox"/>	
<b>Transmission of sampled value model (SVC) (Clause 19)</b>					
Multicast SVC					
S45	SendMSVMessage	MC	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
S46	GetMSVCBValues	TP	<input type="checkbox"/>	<input type="checkbox"/>	
S47	SetMSVCBValues	TP	<input type="checkbox"/>	<input type="checkbox"/>	
S48	SendUSVMessage	TP	<input type="checkbox"/>	<input type="checkbox"/>	
S49	GetUSVCBValues	TP	<input type="checkbox"/>	<input type="checkbox"/>	
S50	SetUSVCBValues	TP	<input type="checkbox"/>	<input type="checkbox"/>	
<b>Control (Clause 20)</b>					
S51	Select		<input checked="" type="checkbox"/>	<input type="checkbox"/>	
S52	SelectWithValue	TP	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
S53	Cancel	TP	<input type="checkbox"/>	<input type="checkbox"/>	
S54	Operate	TP	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
S55	Command-Termination	TP	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
S56	TimeActivated-Operate	TP	<input type="checkbox"/>	<input type="checkbox"/>	
<b>File transfer (Clause 23)</b>					
S57	GetFile	TP	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
S58	SetFile	TP	<input type="checkbox"/>	<input type="checkbox"/>	
S59	DeleteFile	TP	<input type="checkbox"/>	<input type="checkbox"/>	
S60	GetFileAttributeValues	TP	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
<b>Time (5.5)</b>					
T1	Time resolution of internal clock	Nearest negative power of 2 in seconds			
T2	Time accuracy of internal clock	T0			
		T1			
		T2			
		T3			
		T4			
		T5			

T3	Supported TimeStamp resolution	Nearest value of $2^{*-n}$ in seconds
----	--------------------------------	---------------------------------------



*Atop Technologies, Inc.*

[www.atoponline.com](http://www.atoponline.com)  
[www.atop.com.tw](http://www.atop.com.tw)

**TAIWAN HEADQUARTER:**

2F, No. 146, Sec. 1, Tung-Hsing Rd,  
30261 Chupei City, Hsinchu County  
Taiwan, R.O.C.  
Tel: +886-3-550-8137  
Fax: +886-3-550-8131

**ATOP CHINA BRANCH:**

3F, 75<sup>th</sup>, No. 1066 Building,  
Qingzhou North Road,  
Shanghai, China  
Tel: +86-21-64956231

**ATOP INDIA OFFICE:**

Abhishek Srivastava  
Head of India Sales  
Atop Communication Solution(P) Ltd.  
No. 22, Kensington Terrace,  
Kensington Rd,  
Bangalore, 560008, India  
Tel: +91-80-4920-6363  
E-mail: Abhishek.S@atop.in

**ATOP INDONESIA BRANCH:**

Jopson Li  
Branch Director  
Wisma Lampung Jl.  
No. 40, Tomang Raya  
Jakarta, Barat, 11430, Indonesia  
Tel: +62-857-10595775  
E-mail: jopsonli@atop.com.tw

**ATOP EMEA OFFICE:**

Bhaskar Kailas (BK)  
Vice President (Business Development)  
Atop Communication Solution(P) Ltd.  
No. 22, Kensington Terrace,  
Kensington Rd,  
Bangalore, 560008, India  
Tel: +91-988-0788-559  
E-mail: Bhaskar.k@atop.in

**ATOP AMERICAs OFFICE:**

Venke Char  
Sr. Vice President & Head of Business  
11811 North Tatum Blvd, Suite 3031  
Phoenix, AZ 85028,  
United States  
Tel: +1-602-953-7669  
E-mail: venke@atop.in